

HUNTSVILLE, ALABAMA

INTERIOR SIGN STANDARDS

SECTION 1

Sign Type A ROOM IDENTITY SIGNAGE

A1	ROOM ID
A1.1	ROOM ID WITH ROOM NAME
A2	ROOM ID WITH INSERT WINDOW
A3	UNISEX RESTROOM ID
A3.1	WOMENS RESTROOM ID
A3.2	MENS RESTROOM ID
A3.3	SAFE ROOM ID
A3.4	IN CASE OF FIRE WITH PICTOGRAM
A3.5	STAIR ID WITH PICTOGRAM
A4	INTERIOR STAIRWELL ID
A5	EXTERIOR ELEVATOR ID
A6	PROTECTED AREA ID

SECTION 2

Sign Type B EMERGENCY SIGNAGE

B1	EVACUATION MAP
B2	EMERGENCY COMMUNICATIONS

SECTION 3

Sign Type C FLAG SIGNAGE

C1	RESTROOM ID FLAG SIGN
C2	STAIRWELL ID FLAG SIGN
C3	ELEVATOR ID FLAG SIGN
C4	AED ID FLAG SIGN
C5	FIRE EXTINGUISHER ID FLAG SIGN
C6	SAFE ROOM ID FLAG SIGN

SECTION 4

Sign Type D BUILDING DIRECTORIES/WAYFINDING/INFORMATIONAL SIGNAGE

D1	BUILDING DIRECTORY
D2	WALL MOUNTED WAYFINDING
D3	OVERHEAD MOUNTED WAYFINDING

SECTION 5

Sign Type E NOTICE INSERT SIGNAGE

E1	NOTICE INSERT PORTRAIT
E2	NOTICE INSERT LANDSCAPE

Fabrication Specifications

A. Quality Standards

The materials, products, equipment and performance specifications described within, establish a standard of required function, dimension, appearance, performance and quality to be met by the Fabricator.

B. Structural Design

Details on design intent drawings indicate a design approach for sign structure but do not necessarily include all fabrication details required for the complete structural integrity of the signs, including consideration for static, dynamic and erection loads during handling, erecting, and service at the installed locations, nor do they necessarily consider the preferred shop practices of the Fabricator. Therefore, it shall be the responsibility of the Fabricator to perform the complete structural design and engineering of the signs and to incorporate all the safety features necessary to adequately support the sign for its intended use and purpose and to protect the Owner. The Fabricator shall be responsible for ensuring that all signs meet local, state, and federal codes.

C. Vandalism Design

Fabrication and installation design is to withstand severe abuse and souvenir theft vandalism, but not less than the equivalent of resisting simple hand implements and tools (screwdrivers, knives, coins, keys, and similar items), and adult physical force. All hardware and fasteners within reach shall be vandal resistant.

D. Substitution

No substitution will be considered unless the Designer has received written request for approval. Fabricator may recommend equal or better equipment or method, but will be required, prior to a quote submittal, to provide full documentation establishing such a substitution's equality or superiority as measured in the following:

- compliance with the visual design intent;
- cost;
- ease of maintenance; and
- performance.

The burden of proof of the merit of the proposed substitute is upon the Fabricator. The Designer's decision of approval or disapproval of a proposed substitution shall be final.

E. Material Handling

The Fabricator is to pack, wrap, crate, bundle, box, bag, or otherwise package, handle, transport, and store all fabricated work as necessary to provide protection from damage by every cause. Fabricator shall provide clear and legible identifying information on all product packaging to ensure proper on-site review and installation.

F. Construction Methodology

The drawings call for a variety of fabrication techniques. Fabricators are given leeway to fabricate the signs to meet the intent of the designs depicted by the drawings.

Because different systems of extrusions may result in slightly different dimensional requirements, the total height and width dimensions

described in the sign construction on the drawings may be considered "nominal" for the purposes of pricing.

1. All finishes are to be satin finish, free from fading, peeling or cracking. Paint preparation of all exterior metal surfaces of the sign to include removal of all scratches and imperfections, sanding and chemical etching. Substrate cleaning, preparation, paint application and paint thickness to be in strict compliance with Matthews Paint or AkzoNobel published recommendations. Acceleration of the drying process is not allowed.

2. Except where approved otherwise by Owner, conceal fasteners. Use countersunk screws for all applications - painted to match material.

3. On welded joints, dimensional and structural welding defects will not be accepted, including but not limited to: poor weld contours, including excessive bead convexity and reinforcement, and considerable concavity or undersized welds; cracks; undercutting; porosity; incomplete fusion; inadequate penetration; spatter; and non-metallic inclusions. Welding is to be performed by AWS (or similar) certified personnel, following AWS Standard Welding Procedure Specifications (SWPSs) for steel, aluminum and stainless steel as appropriate.

4. Non-welded joints between various portions of signs must have a tight, hairline-type appearance, without gaps unless a reveal dimension has been called for or approved. Provide sufficient fastenings to preclude looseness, racking, or similar movement.

5. Non-illuminated inserts will minimally be ink-jet printed at 1200 DPI using water-based UV inks on a white heavy weight coated paper, with a 3 mil. matte UV over-laminate on the front surface and a 3 mil. gloss laminate on the back surface. The thickness of the photo paper must be heavy enough such that no wrinkles or waves will occur once installed into the sign housings.

6. For sign types required to sit behind a non-glare front lens or "window", this window must be of not greater thickness than 0.100" and must be a premium non-glare product equal to or exceeding Calsak Acrycast LX cast acrylic sheet, free from surface imperfections or ripples.

7. All enclosures or housings of message inserts must have fabrication tolerances such that the message inserts touch or remain not more than 1/32" from the inside face of the window.

8. Any insert designed for a given sign type must fit properly into all same sign types.

9. It will be the Fabricator's responsibility to generate all messages, including necessary tactile and contracted Grade 2 Braille, from the message schedule. The Designer will not produce graphic files for all sign messaging.

10. Any overhead signs installed in a location with a ceiling grid must incorporate a 1" x 1" aluminum angle above the grid. The mounting rail must be mechanically fastened to the aluminum angle for strength.

G. Fonts/Typefaces

The fonts used for this project were selected specifically for this project by the Designer and Owner, and include those listed in the graphic standards. It is the responsibility of the fabricator to purchase the fonts.

No substitution of any other typefaces may be made. Under no circumstances are typefaces to be electronically distorted ("squeezed" or "extended") for purposes of fitting to the specified sign or general alteration of the sign face composition unless noted in the drawings. This includes (but is not limited to) stretching, squeezing, tilting, outlining or shadowing.

1. All letterforms, symbols or graphics shall be reproduced either by photographic or computer-generated means. Hand-cut characters are not acceptable. Cutting shall be done in such manner that edges and corners of finished letterforms will be sharp and true. Letterforms with nicked, cut, ragged, rounded corners, and similar disfigurements will not be acceptable.

2. All letterforms shall be made from components, material and gauge as indicated on design intent drawings. Typefaces shall be replicated as indicated on the drawing.

3. Ligatures are to be turned off.

4. Apostrophes are to be used, not footmarks. Note that there is a difference in most fonts.

5. Silk-screened and vinyl copy is to match the sheen of the copy panel background (satin). Edges of letters shall be straight and corners sharp. Surface of letters shall be uniform in color finish, and free from pinholes and other imperfections.

6. Silk-screened images shall be executed with photo screens prepared from vector art files. No hand-cut screens will be accepted. Original art shall be defined as artwork that is a first generation reproduction of the specified art.

7. Silk-screening shall be highest quality, with sharp lines and no sawtooths or uneven ink coverage. Screens shall be photographically produced. Application of inks through screens shall consist of one flood pass and one print pass. Images shall be uniform in color and ink thickness. Images shall be free from squeegee marks and lines resulting from improper print stroke or screen off contact height. Signs shall be placed in adequate drying racks with minimum of 2" between racks for ample airflow. Sign racks shall have system of forced airflow between layers to provide proper drying and curing of inks. After signs have dried completely according to the ink manufacturer's time allowance, signs may be packaged.

8. The edges and corners of computer-cut or routed letterforms shall be sharp and true. Letterforms with nicked, cut, ragged, rounded (positive or negative) corners, and similar disfigurements will not be acceptable. Letterforms shall be aligned so as to maintain a base line parallel to the sign format, with margins and layout as indicated on design intent drawings and approved shop drawings. Vertical strokes shall be plumb. Mechanically fasten center of letters to acrylic plastic as required.

9. Vinyl letterforms shall be computer-cut.

10. All tactile and Grade 2 Braille characters are to be contracted and created using the photopolymer or raster dot method as dictated by code requirements.

Acceptable Substitutions:

Photopolymer is an acceptable substitution fabrication method for interior ADA signage only. All exterior ADA signage must remain fabricated as thermocompressed. However, all other signage specs must remain the same (thickness, materials, finishes, mounting, etc.).

*Bidder must note if a substitution is quoted at time of bid submission; All substitutions are subject to UAH approval.

Installation Specifications

H. Site Visit

Prior to installation of the signs, the Fabricator is to visit the proposed site to observe existing conditions and verify all signage required and its location with Owner/General Contractor. Site-verify all locations to determine special requirements. The Fabricator must contact the Owner prior to the start of installation to coordinate with other trades performing work on site.

The final Sign Message Schedule and Sign Location Plan shall be consulted together and shall be approved by the Owner to determine the precise location for each sign. Any necessary adjustments will be made with the approval of the Owner.

I. Mounting

All signs to be mounted level and true, and within the guidelines of the Americans with Disabilities Act (ADA) and other local codes, where applicable. All exposed hardware is to be touch-up painted on site as required.

While sign type drawings may specify or indicate possible mounting and/or mounting hardware details, the Fabricator will be able to substitute equal or better hardware and techniques, based upon their experience with similar mounting situations and as long as the visual appearance of the sign is not compromised from that shown in the design intent drawings, and as long as it does not require that exposed surfaces or structure of the architectural space that may have been prepared for signage be redone.

All signage products must be installed such that there are no misalignments between visible components. It will be the responsibility of the Fabricator to correct any installation misalignments at no charge.

It is the responsibility of the Fabricator to work with the Owner to review all sign locations and ensure that every location has the necessary blocking for safe and secure mounting. Where additional blocking is needed, the Fabricator is responsible for recommending changes and additional associated costs, and is to receive approval prior to beginning installation.

Fabricator and their installers are expected to have knowledge of ADA mounting guidelines and other applicable local codes, general sign locating practices, and any particular unique installations defined by Designer. It is the desire of the Owner that the Fabricator follow these guidelines and regulations as well as architectural cues in installing for the best visual placement, keeping a reasonable distance from protruding objects. Any signage that is improperly located is to be moved to the proper location by the Fabricator, and repairs to wall surfaces and signage are to be at the Fabricator's expense.

If the installers are unable to make a decision about any sign locations, they can contact the Designer, providing a graphic representation of the questionable area, or contact the Owner for on-site options.

J. Punch List

It is required that the Fabricator completes a walk through with the Owner immediately following installation to identify any errors, such as construction or installation issues. Such errors are to be corrected in a timely manner, and to the satisfaction of the Owner.

K. Warranty

The Fabricator is to provide a written five (5) year full replacement warranty to the Owner that all signs will be free of defects due to craft work and materials including, but not limited to:

- assemblies not remaining true and plumb on their supports, mountings giving way or loosening, and separation of components;
- fading and discoloration of the colors and finishes within the vinyl and paint manufacturer's stated warranty period;
- peeling, delamination or warping ("oil canning"); and
- repair and reinstallation of signage due to failed mountings.


Fabricator shall also extend in writing to the Owner all manufacturers' warranties.

L. Repair or Replacement

Without additional cost to the Owner the Fabricator shall repair or replace, including installation, any defective signs or hardware that develop during the warranty period and repair any damage to other work due to such imperfections. The Fabricator will be required to fully replace all signs that are in error relative to the working documents (sign message schedule and sign type drawings) submitted to the Fabricator upon award of contract.



Full Logo

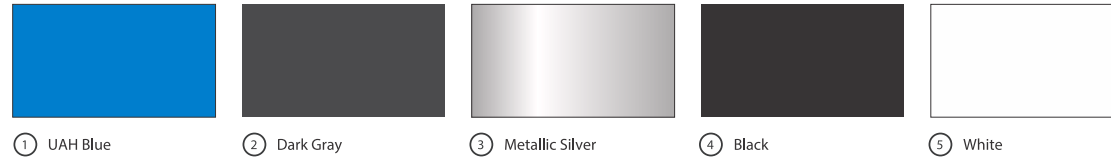

Pantone®: 3005	---	---	Black	White
Matthews Paint: MP79568	AkzoNobel 499F5*	MP18071	MP30116	MP27386
Oracal Series 951 Opaque Vinyl547 Fjord Blue	073 Dark Gray	904 Silver Lake**	070 Black	010 White

*Match Matthews paint color to AkzoNobel color specified. **3M Satin Aluminum vinyl can be substituted.

Typography Standards

Avenir Next LT Pro Medium


Aa Bb Cc Dd Ee Ff Gg Hh Ii Jj Kk Ll Mm Nn Oo Pp Qq Rr Ss Tt Uu Vv Ww Xx Yy Zz 0 1 2 3 4 5 6 7 8 9

NOTE: WHERE APPLICABLE, USE SPECIALTY FONT(S) AS CALLED OUT ON SIGN TYPE SPECIFICATION PAGE.


Visual and Tactile Compliance

State and Local Requirements

CHARACTER & STROKE WIDTHS: TACTILE

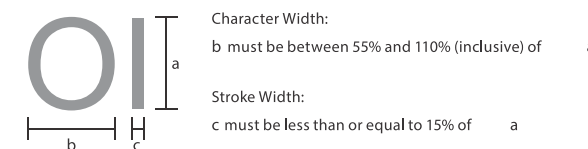


CHARACTER & STROKE WIDTHS: VISUAL

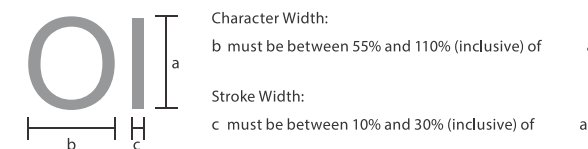

STATE & LOCAL REQUIREMENTS

This information is a summary of the Americans with Disabilities Act and it reflects the federal requirements. Individual states, counties & cities may have more restrictive requirements in their building codes & ordinances.

Font: Avenir Next LT Pro Condensed Medium

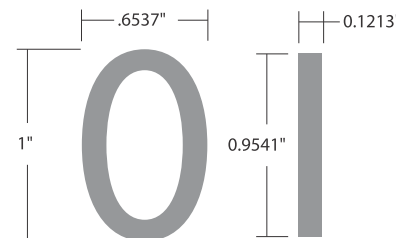


Tactile Character Width:
.6537/.9541=68.5%
PASS

Tactile Stroke Width:
.1213/.9541=12.7%
PASS

Visual Character Width:
.6537/.9541=68.5%
PASS

Visual Stroke Width:
.1213/.9541=12.7%
PASS

Font: Avenir Next LT Pro Medium

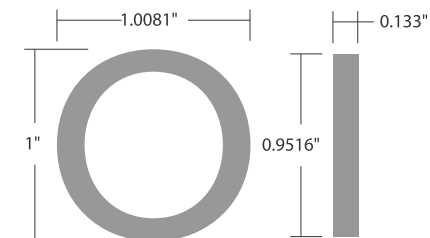

Tactile Character Width:
1.0081/.9516=105.9%
PASS

Tactile Stroke Width:
.133/.9516=13.9%
PASS

Visual Character Width:
1.0081/.9516=105.9%
PASS

Visual Stroke Width:
.133/.9516=13.9%
PASS

Pictograms



WOMEN'S
ACCESSIBLE
RESTROOM



MEN'S
ACCESSIBLE
RESTROOM




MEN & WOMEN'S
ACCESSIBLE
RESTROOM



IN CASE OF FIRE
USE STAIRS



ELEVATOR



STAIR



TORNADO
SHELTER



FIRE
EXTINGUISHER



AUTOMATED
EXTERNAL
DEFIBRILLATOR




ARROW

Mounting Heights for Room Identity Signage (Types A1-A3 & A6)


NOTES:

1. Acrylic panel painted
2. Secure to wall with VHB Tape & silicone.
3. Typical wall.

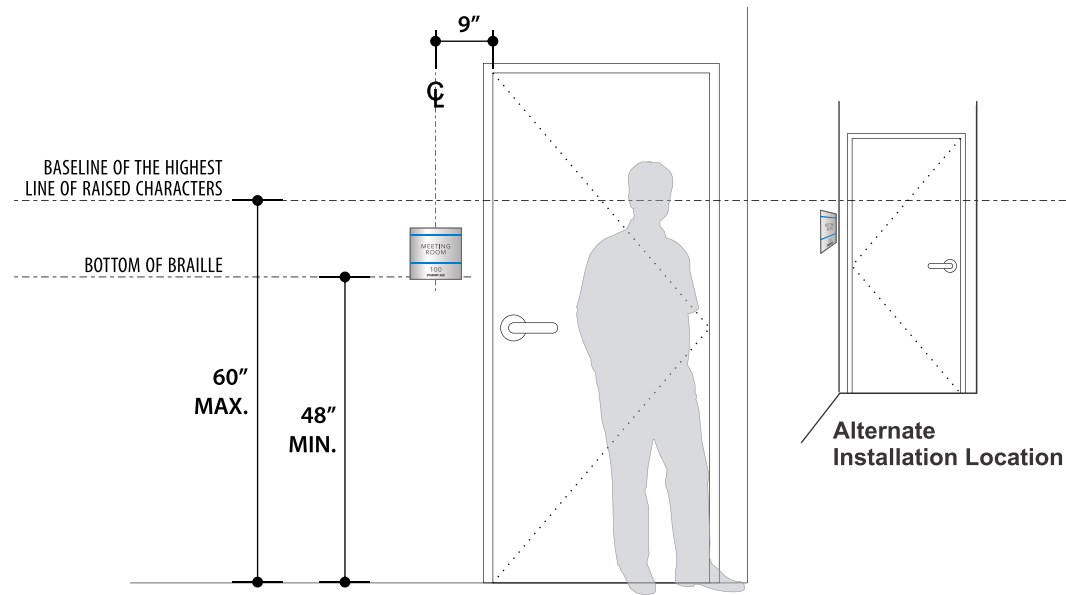


A Preferred Typical Installation Location
* All tactile exit signs will be placed on the same side of the door as the visual exit signs.

TYPICAL MOUNTING

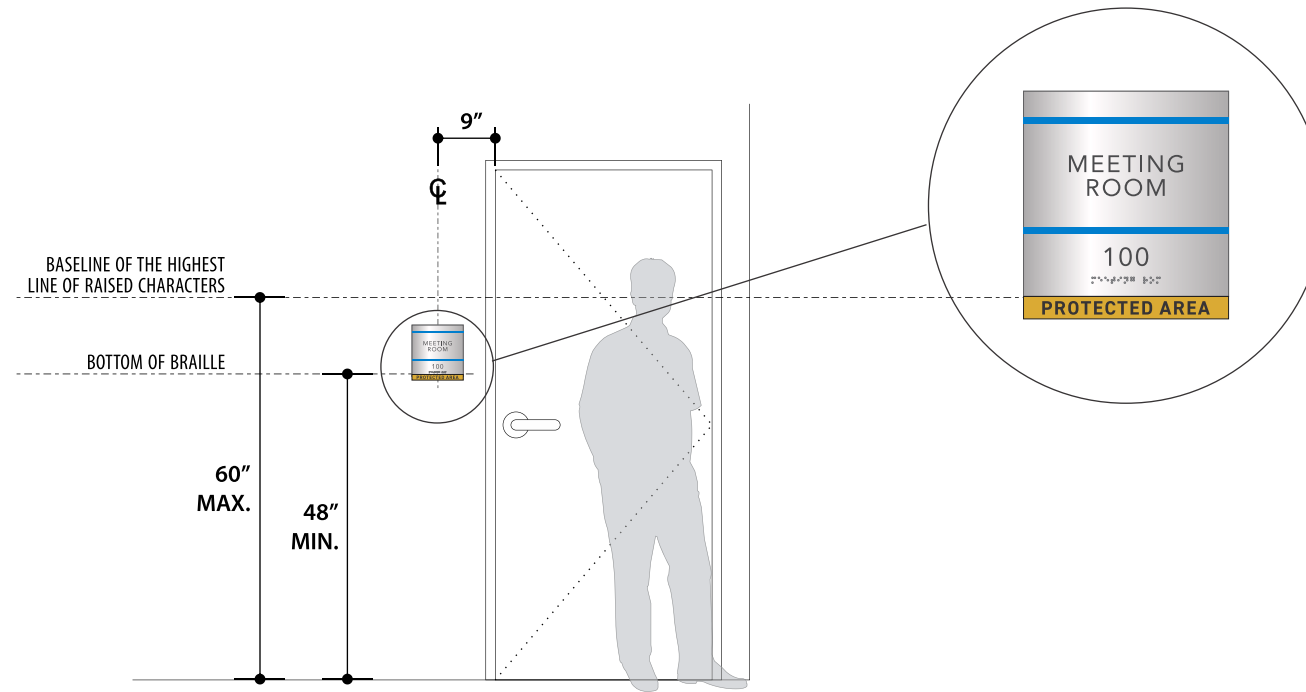

TYPICAL MOUNTING FOR PROTECTED AREAS

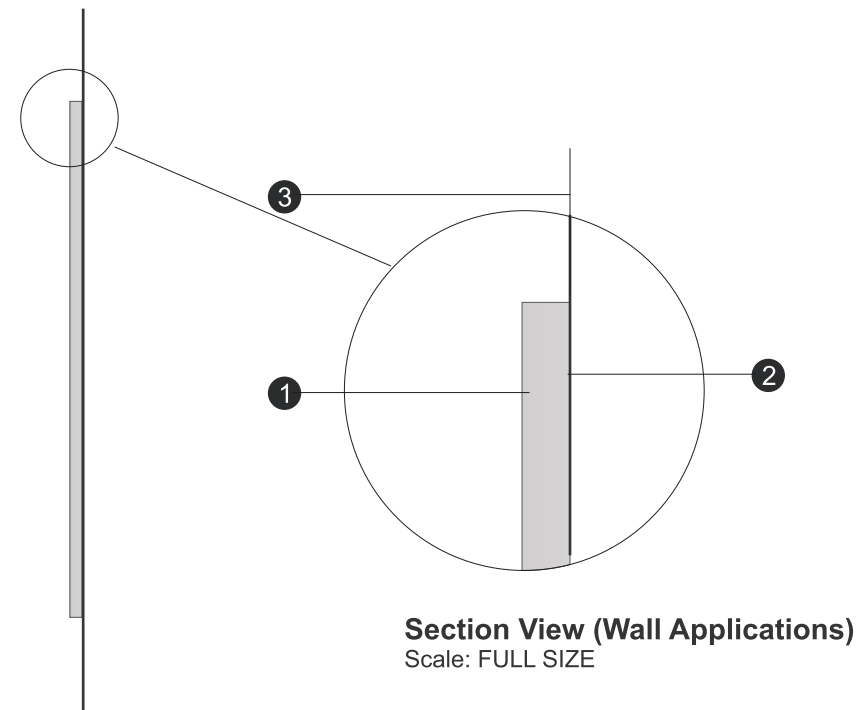

Section View (Wall Applications)
Scale: FULL SIZE

Side View
Scale: 3" = 1'-0"

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425


THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



Mounting Heights for Room Identity Signage (Types A1-A3 & A6 INSTALLED ONTO GLASS SURFACES)

NOTES:


1. Acrylic panel painted
2. Secure to wall with VHB Tape & silicone.
3. For glass mounted locations, add 3/16" thick black acrylic backer applied to 2nd surface of glass with VHB tape. Backer to be same size as frame and installed aligned with frame to conceal vhb tape.
4. Glass Wall.

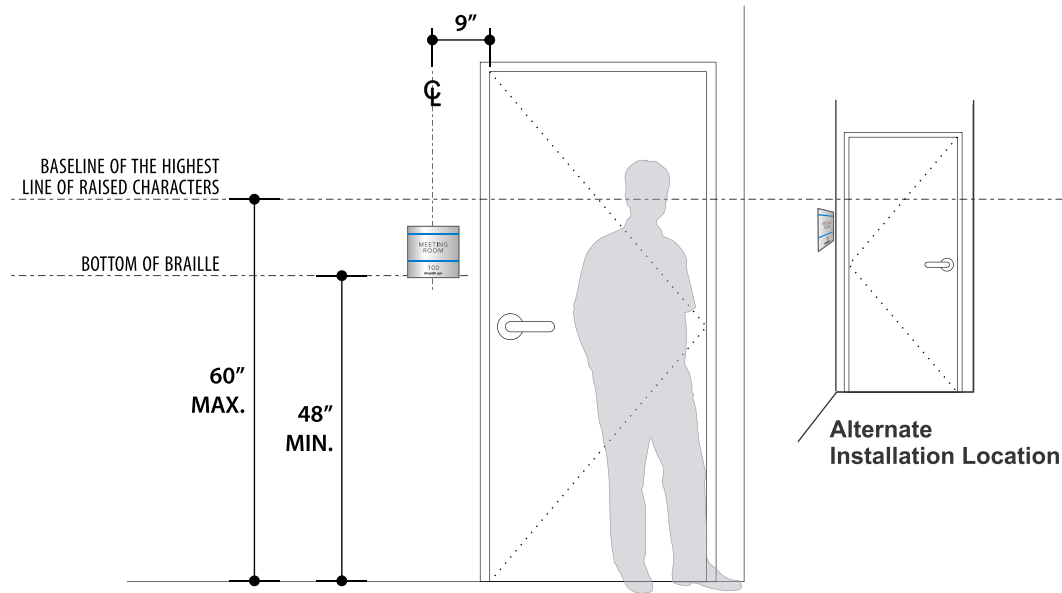


A Preferred Typical Installation Location

* All tactile exit signs will be placed on the same side of the door as the visual exit signs.

TYPICAL MOUNTING

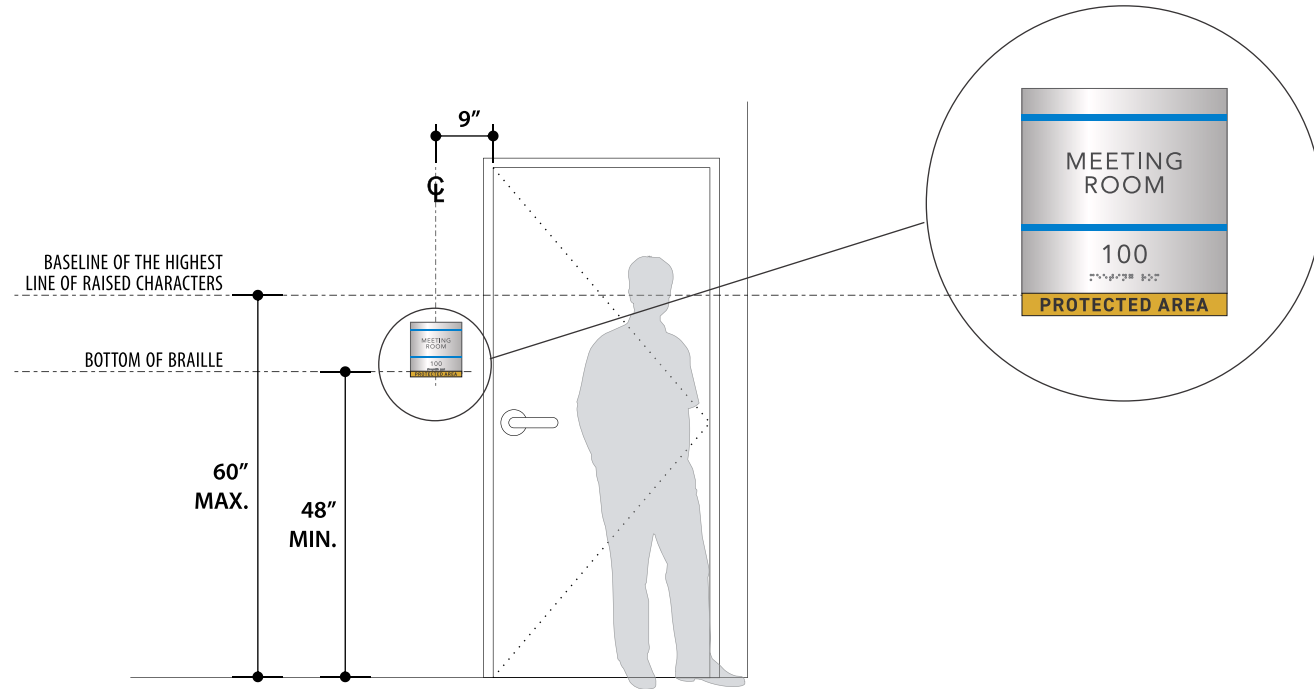

TYPICAL MOUNTING FOR PROTECTED AREAS

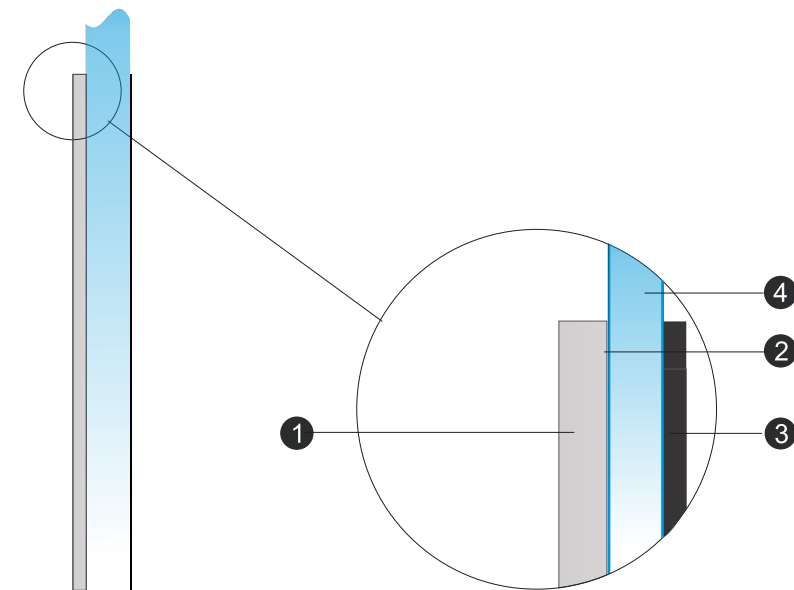

Section View (Glass Applications)
Scale: FULL SIZE

Side View
Scale: 3" = 1'-0"


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




Mounting Heights for Room Identity Signage (Types A4-A5)

-A4: Interior Stairwell ID

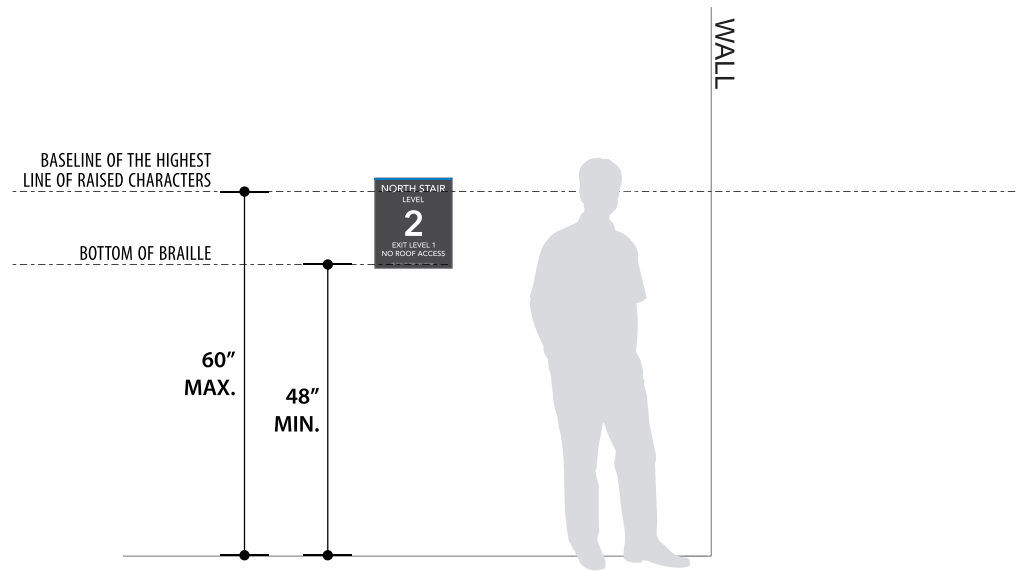


A Preferred Typical Installation Location
 * All tactile exit signs will be placed on the same side of the door as the visual exit signs.

-A5: Exterior Elevator ID

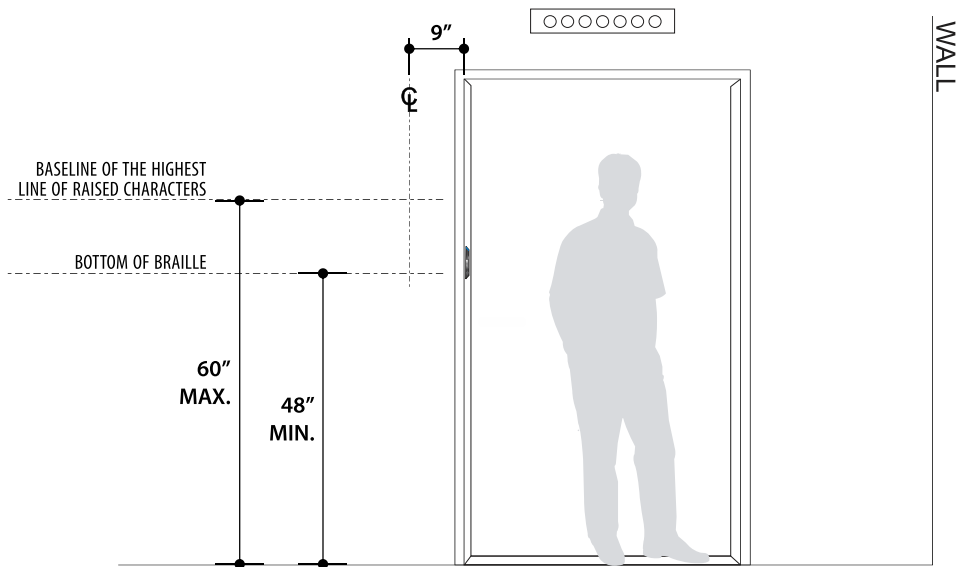

A Preferred Typical Installation Location
 * All tactile exit signs will be placed on the same side of the door as the visual exit signs.

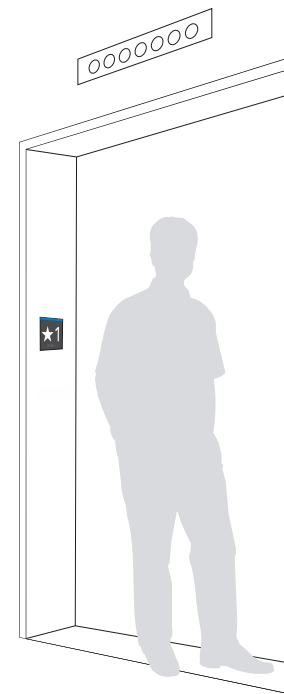

Alternate Viewing Angle

NOTES:


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




Mounting Heights for Emergency Signage (Types B1-B2)

-B1: Evacuation Map

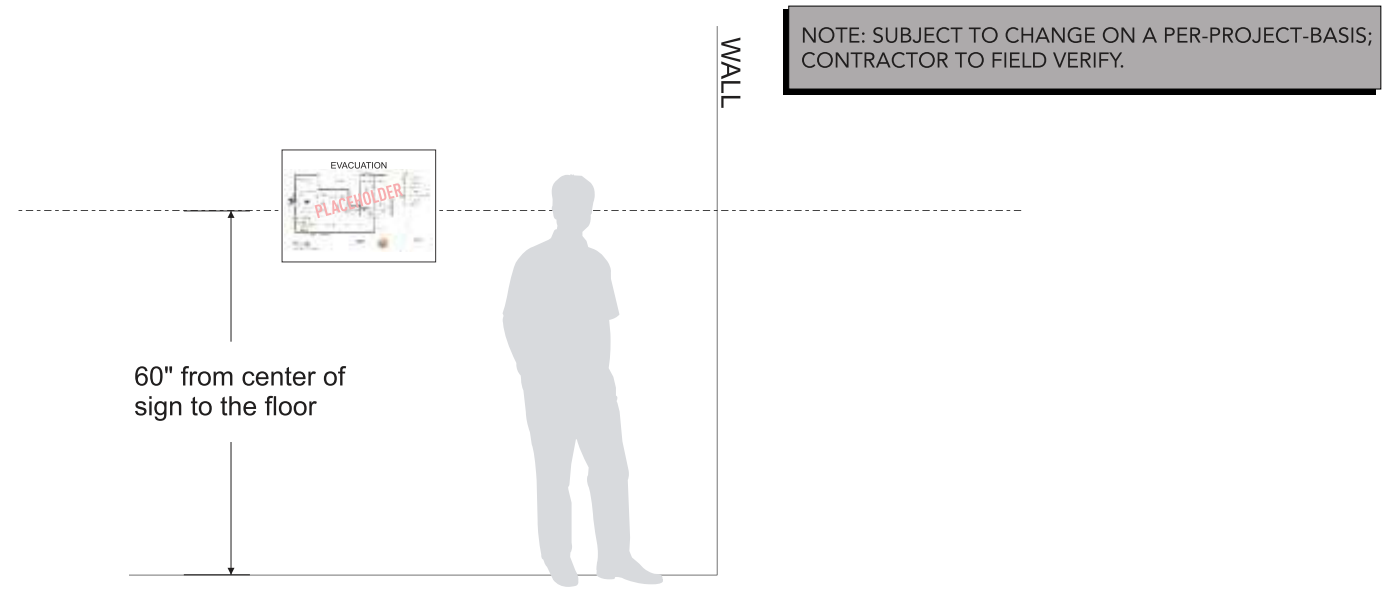

-B2: Emergency Communications

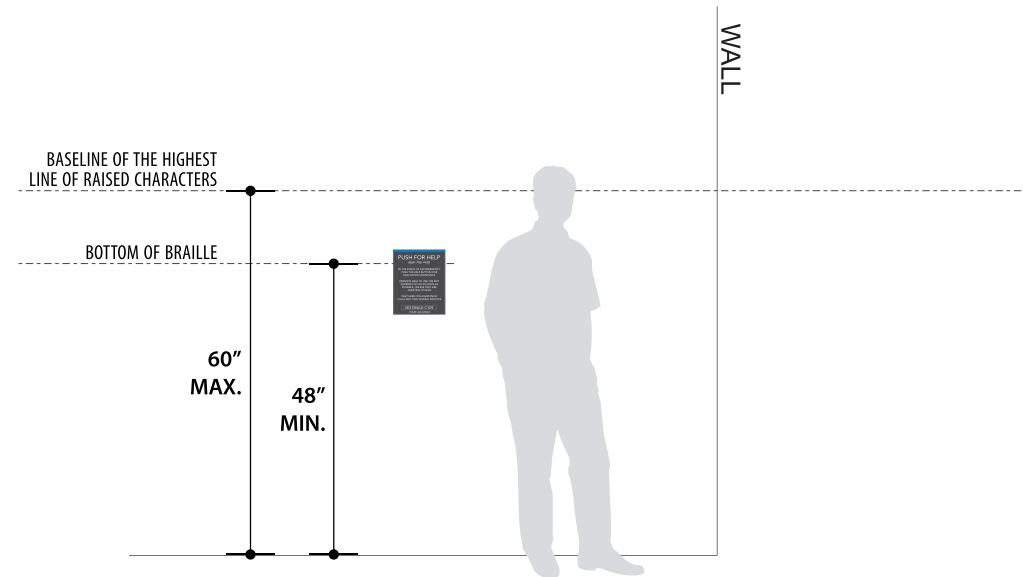

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425


THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



Mounting Heights for Building Directories/Wayfinding/Information Signage (Types D1-B3)


-D1: Building Directories

NOTE: SUBJECT TO CHANGE ON A PER-PROJECT-BASIS; CONTRACTOR TO FIELD VERIFY.

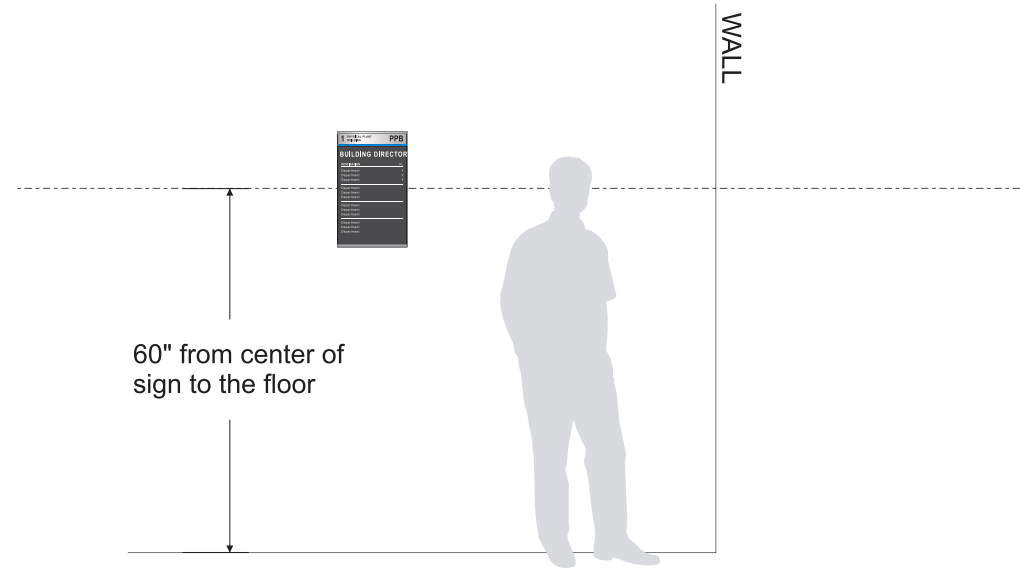


-D2: Wall Mounted Wayfinding

NOTE: SUBJECT TO CHANGE ON A PER-PROJECT-BASIS; CONTRACTOR TO FIELD VERIFY.

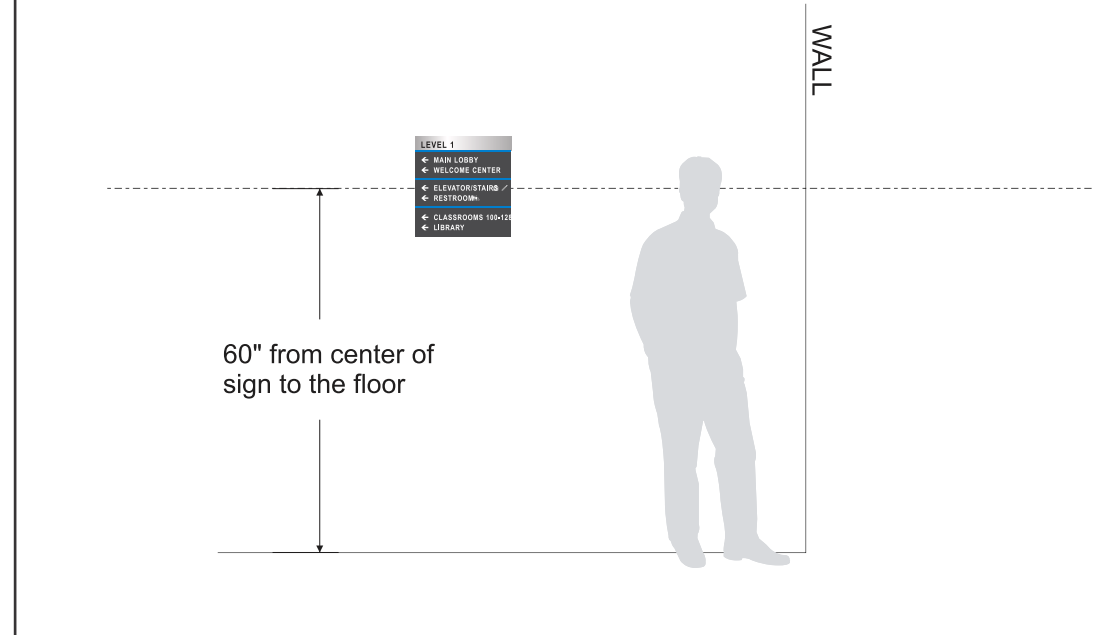

-D3: Overhead Mounted Wayfinding

NOTE: MOUNTED FLUSH TO CEILING AND CENTERED HORIZONTALLY WITHIN SPACE. SUBJECT TO CHANGE ON A PER-PROJECT-BASIS; CONTRACTOR TO FIELD VERIFY.

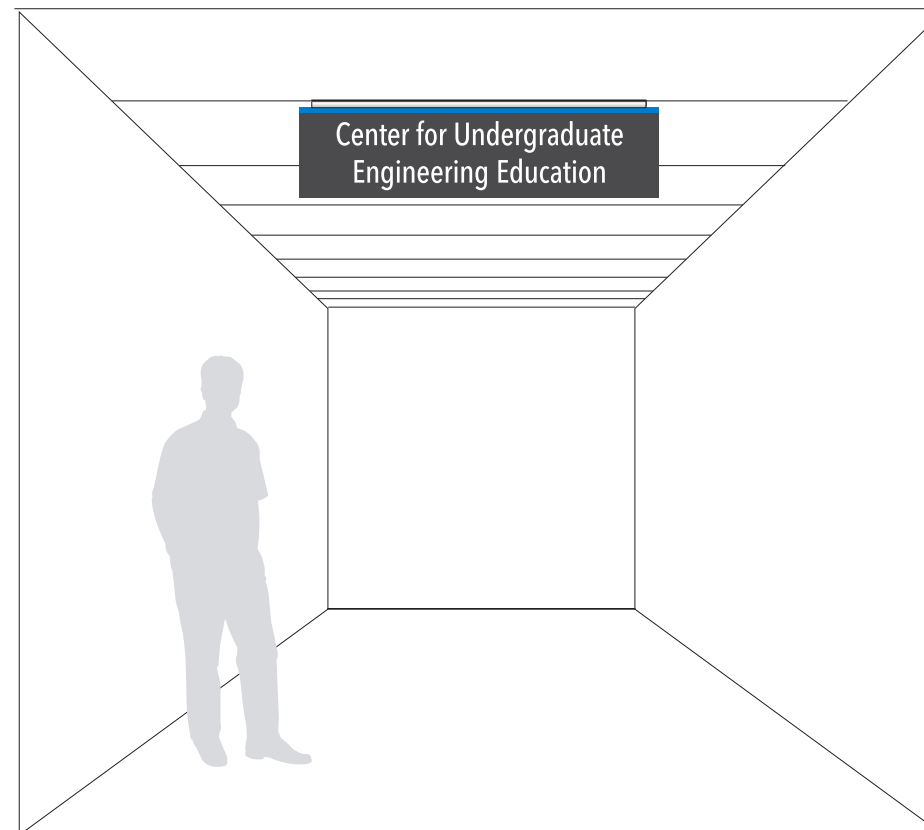

NOTES:

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.






KNIGHT SIGN INDUSTRIES, INC.


5959 Knight Ave. Tuscaloosa, AL 35405
www.knightsign.com 205.345.5242

NOTES:


1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint AkzoNobel 499F5; Font: Avenir Next LT Pro Medium.
3. Grade II braille, clear.
4. VHB tape & silicone to wall.
5. Typical wall.

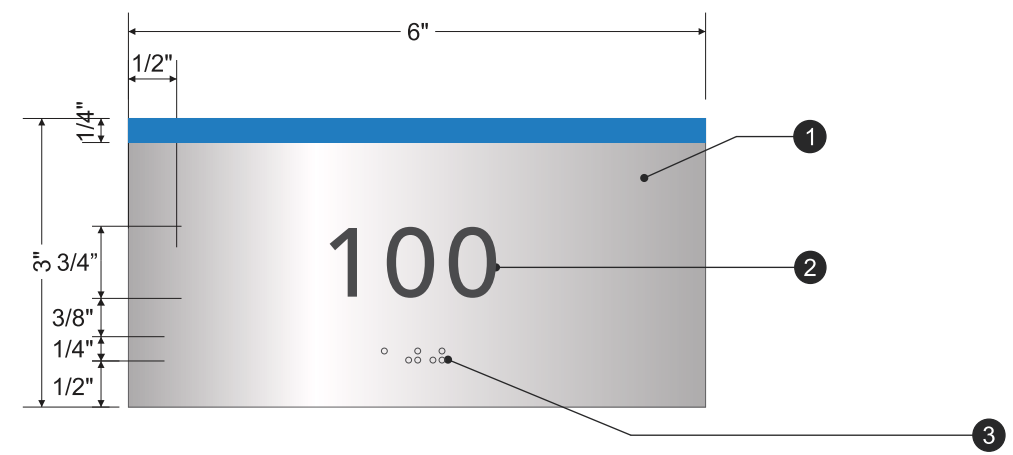

Front View
Scale: 1/2 of actual size

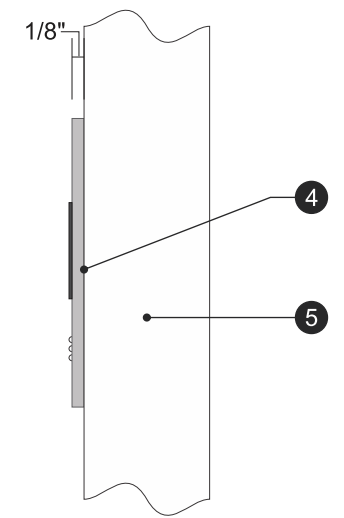

Side View
Scale: 1/2 of actual size

-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



Mounting Heights for Flag Signage (Types C1-C6)


NOTES:

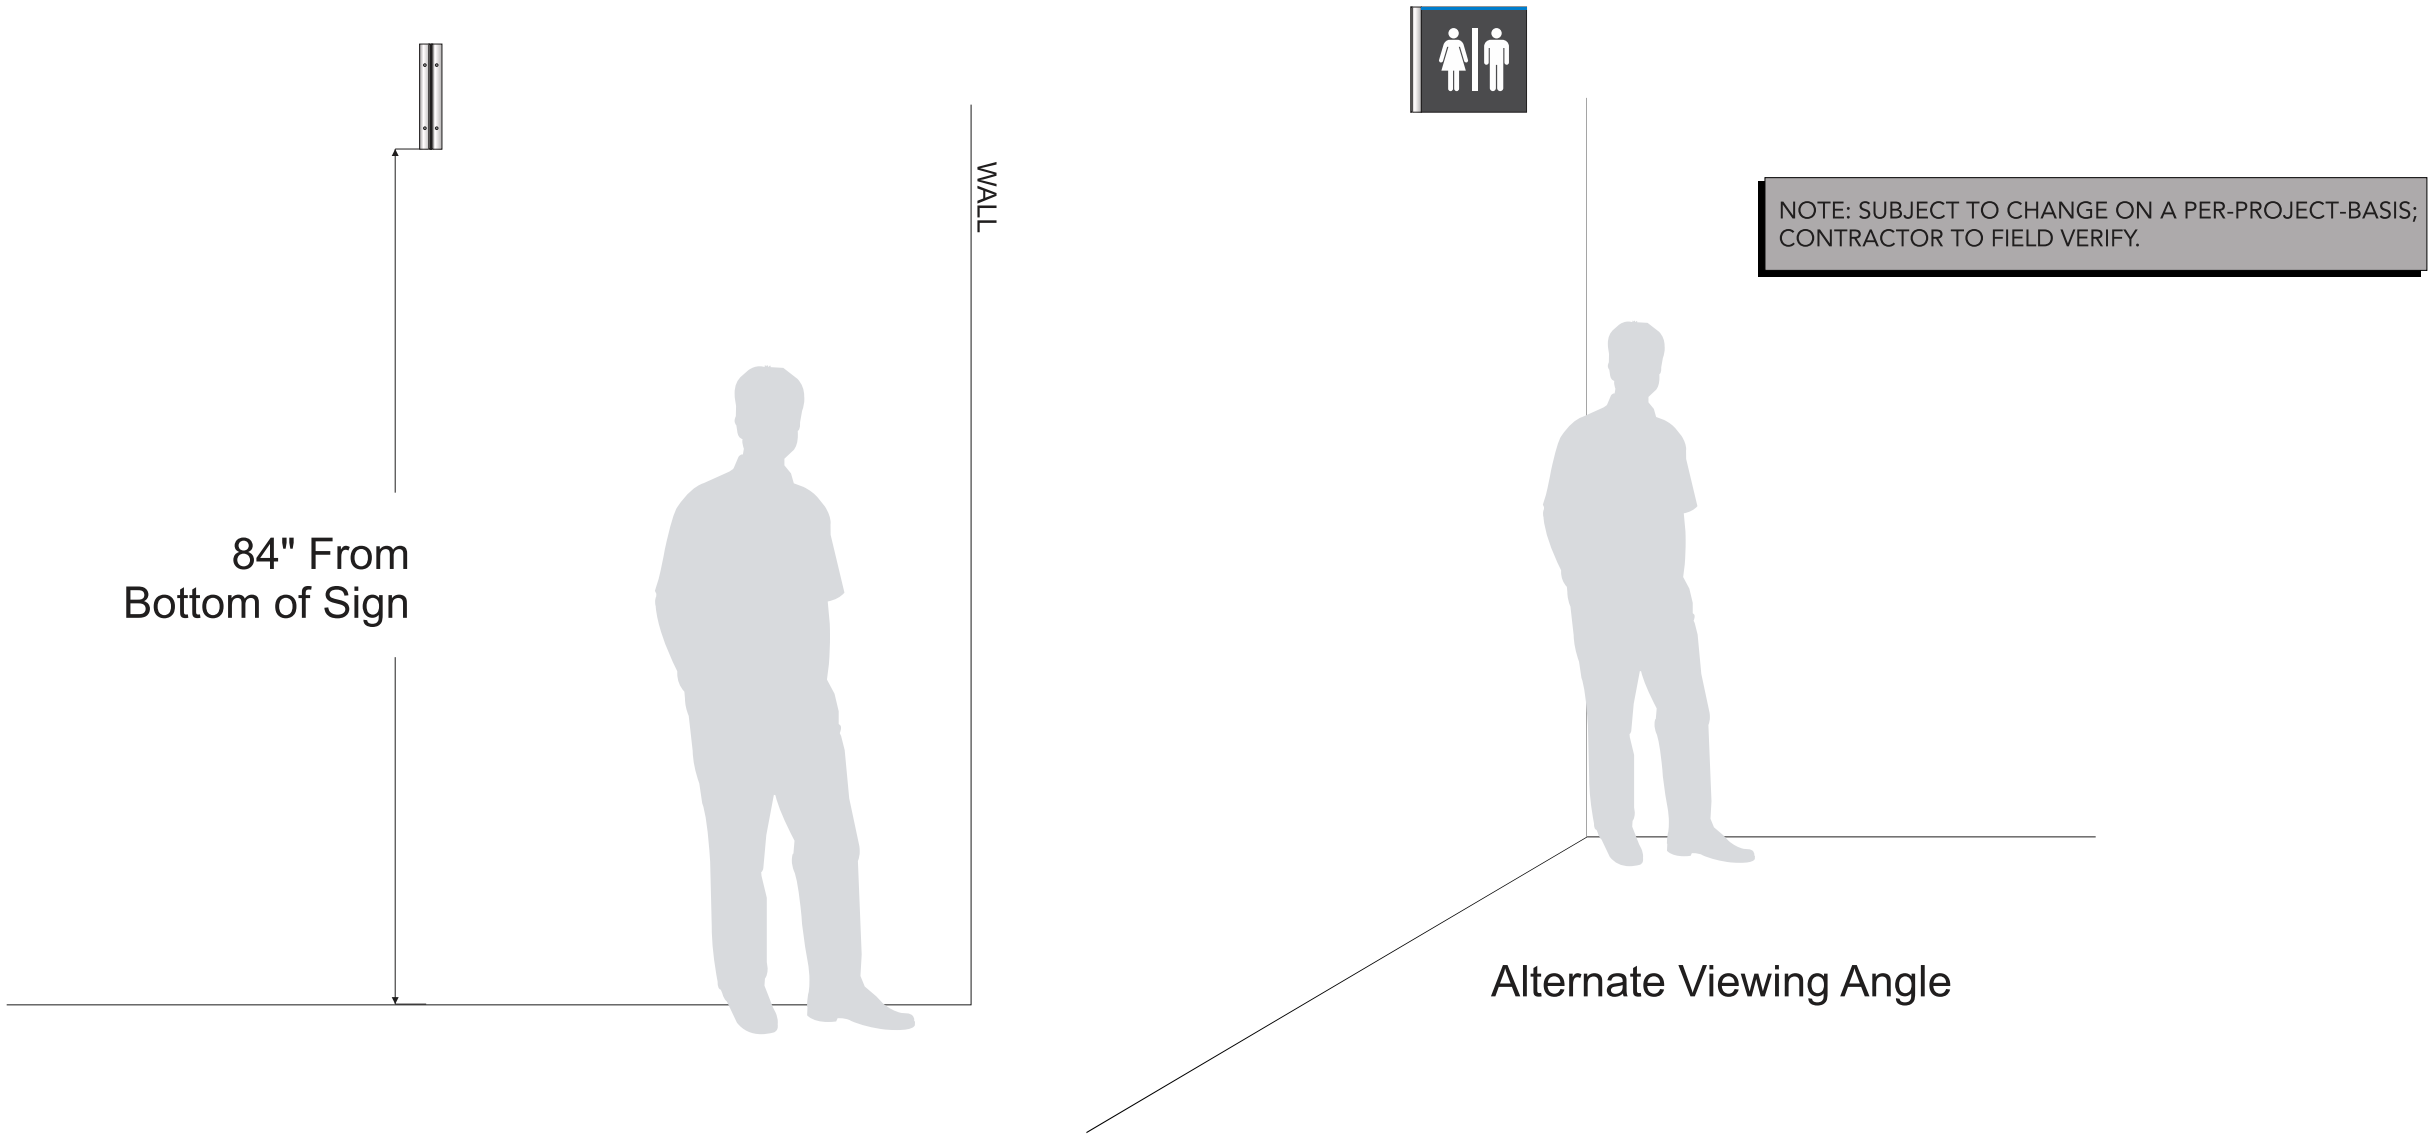

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425


THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



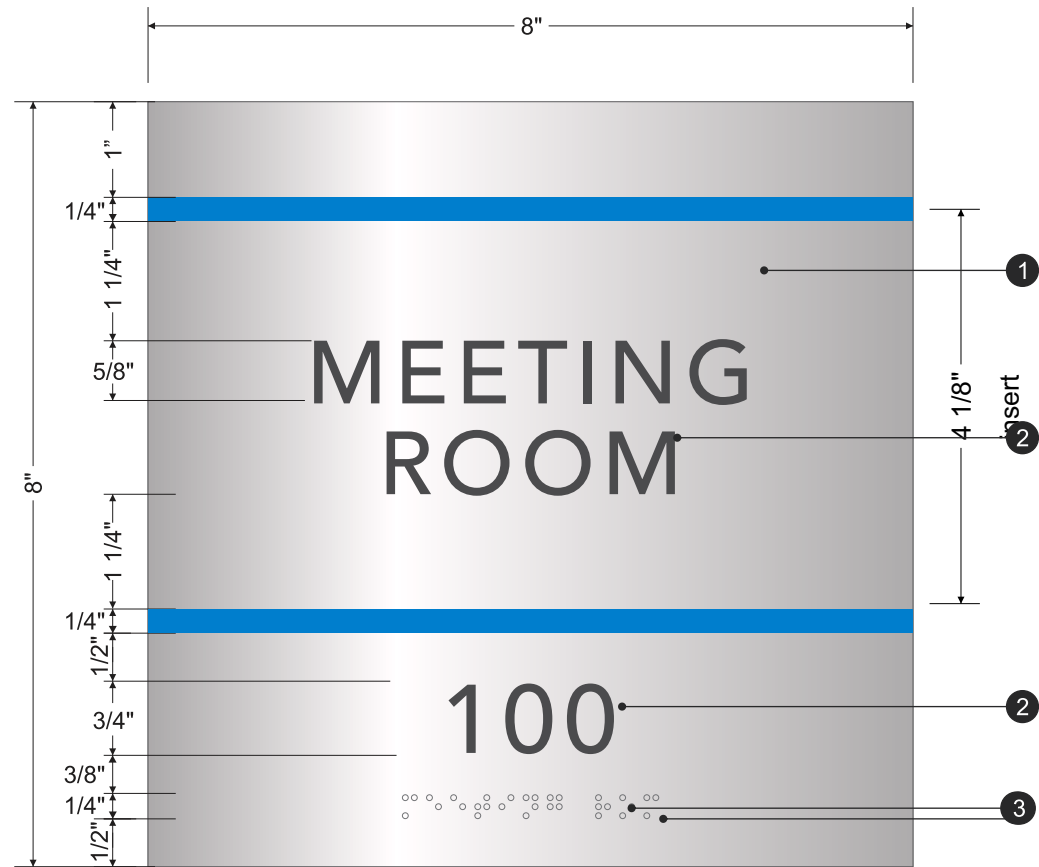


Front View

Scale: 1/2 of actual size

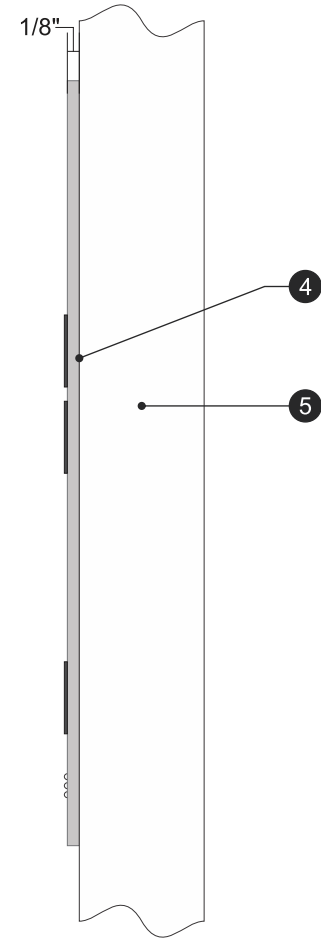

Side View

Scale: 1/2 of actual size

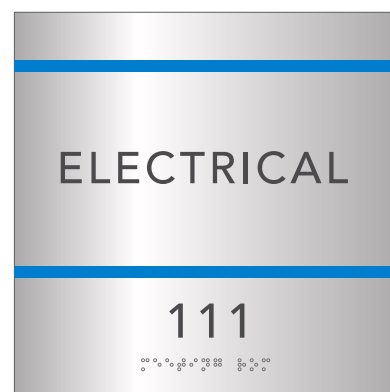


Additional Signs


Scale: 3" = 1'-0"

NOTES:

1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with 1/4" wide lines painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint AkzoNobel 499F5; Font: Avenir Next LT Pro Medium.
3. Grade II braille, clear.
4. VHB tape & silicone to wall.
5. Typical wall.

 MP79568


 MP18071 Metallic Silver

 AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



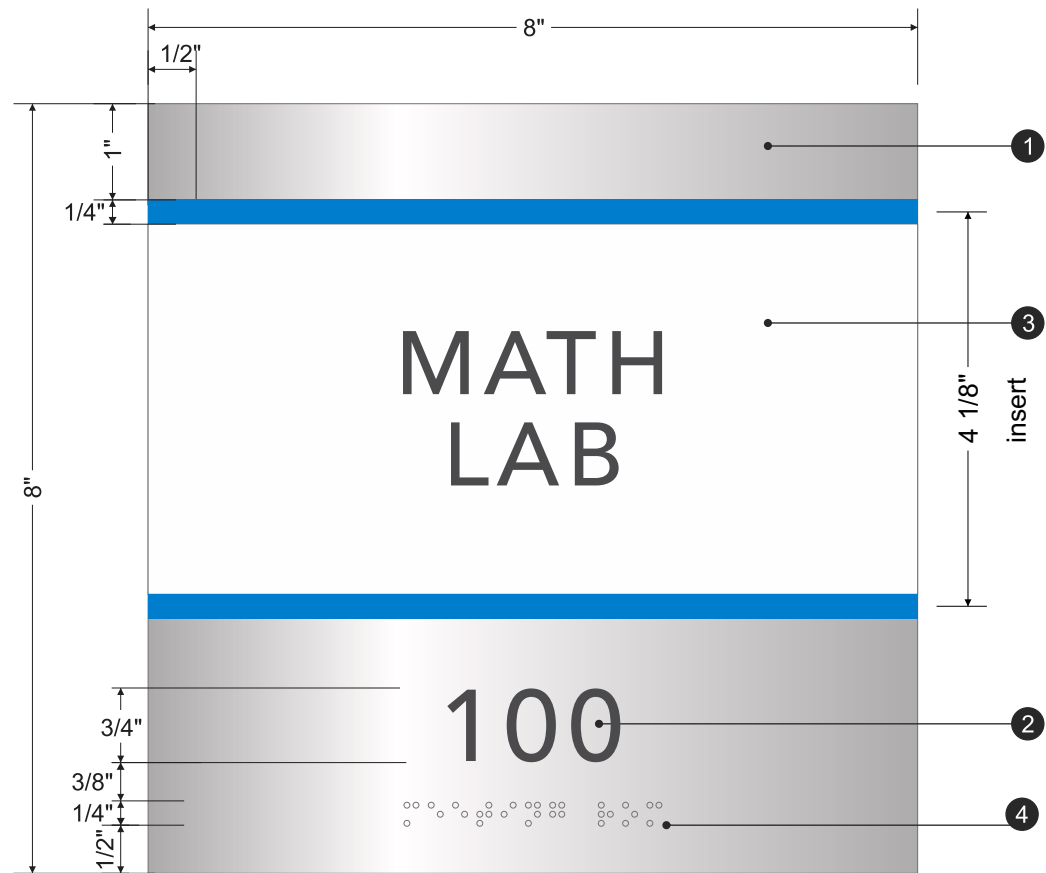

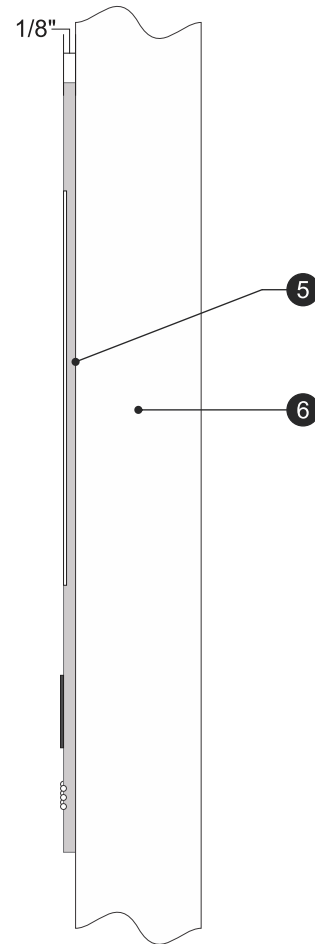


Front View
Scale: 1/2 of actual size




Side View
Scale: 1/2 of actual size

NOTES:


1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with 1/4" wide lines painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint AkzoNobel 499F5; Font: Avenir Next LT Pro Medium.
3. Clear window cover with changeable 4 1/8" x 8" insert.
4. Grade II Braille, clear.
5. VHB tape & silicone to wall.
6. Typical wall.

-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

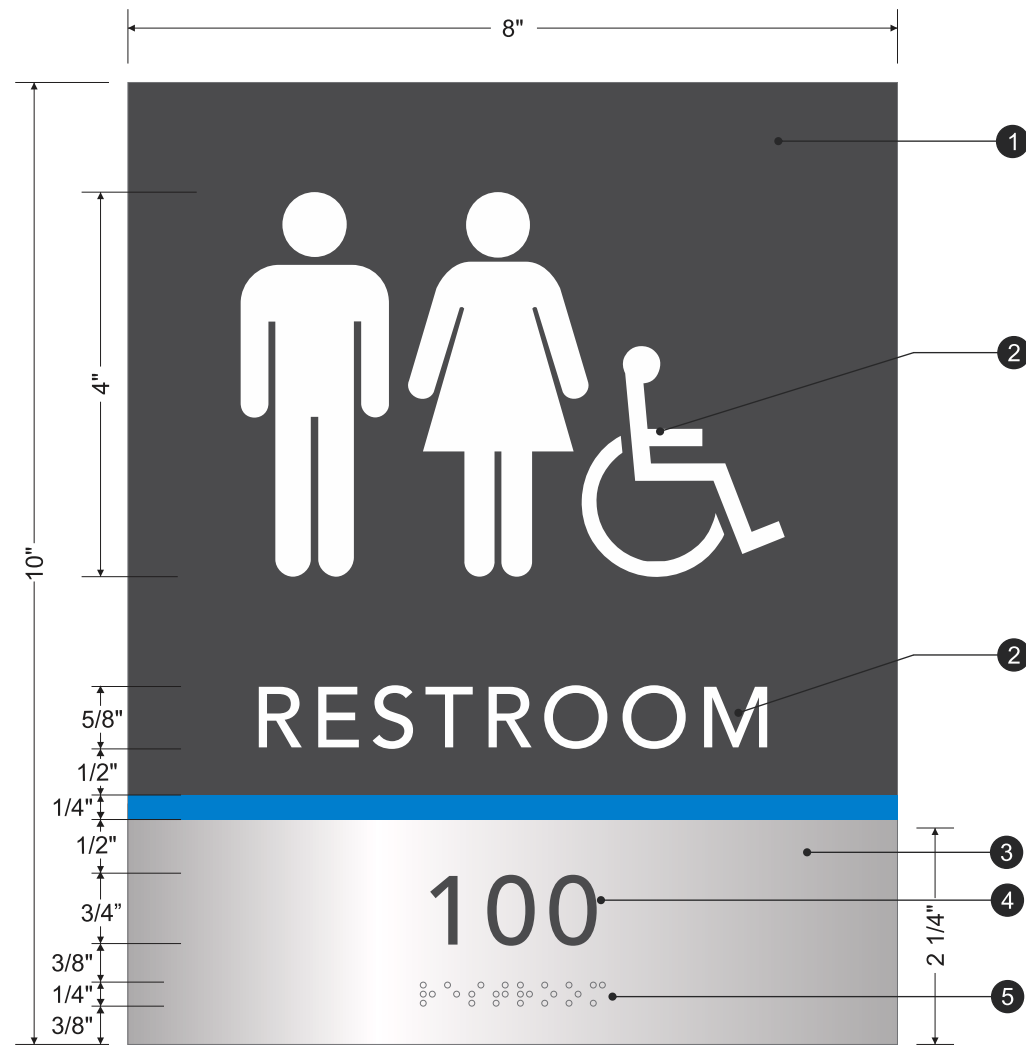

Front View
Scale: 1/2 of actual size

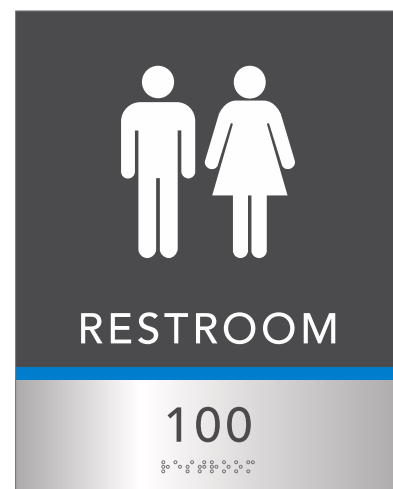



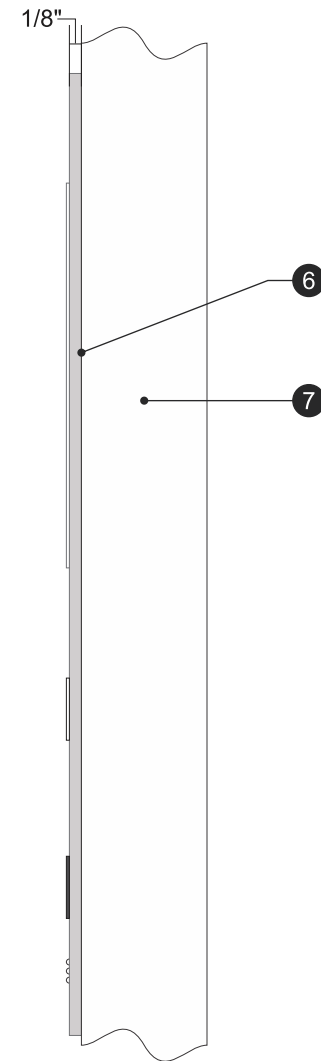

Alternative Sign (For Non-ADA Restrooms)
Scale: 3" = 1'-0"



Side View
Scale: 1/2 of actual size

NOTES:


1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint MP 27386.
3. Paint MP18071.
4. 1/32" Raised, Paint AkzoNobel 499F5; Font: Avenir Next LT Pro Medium.
5. Grade II Braille, clear.
6. VHB tape & silicone to wall.
7. Typical wall.

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM 229425
Drawing Number:

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




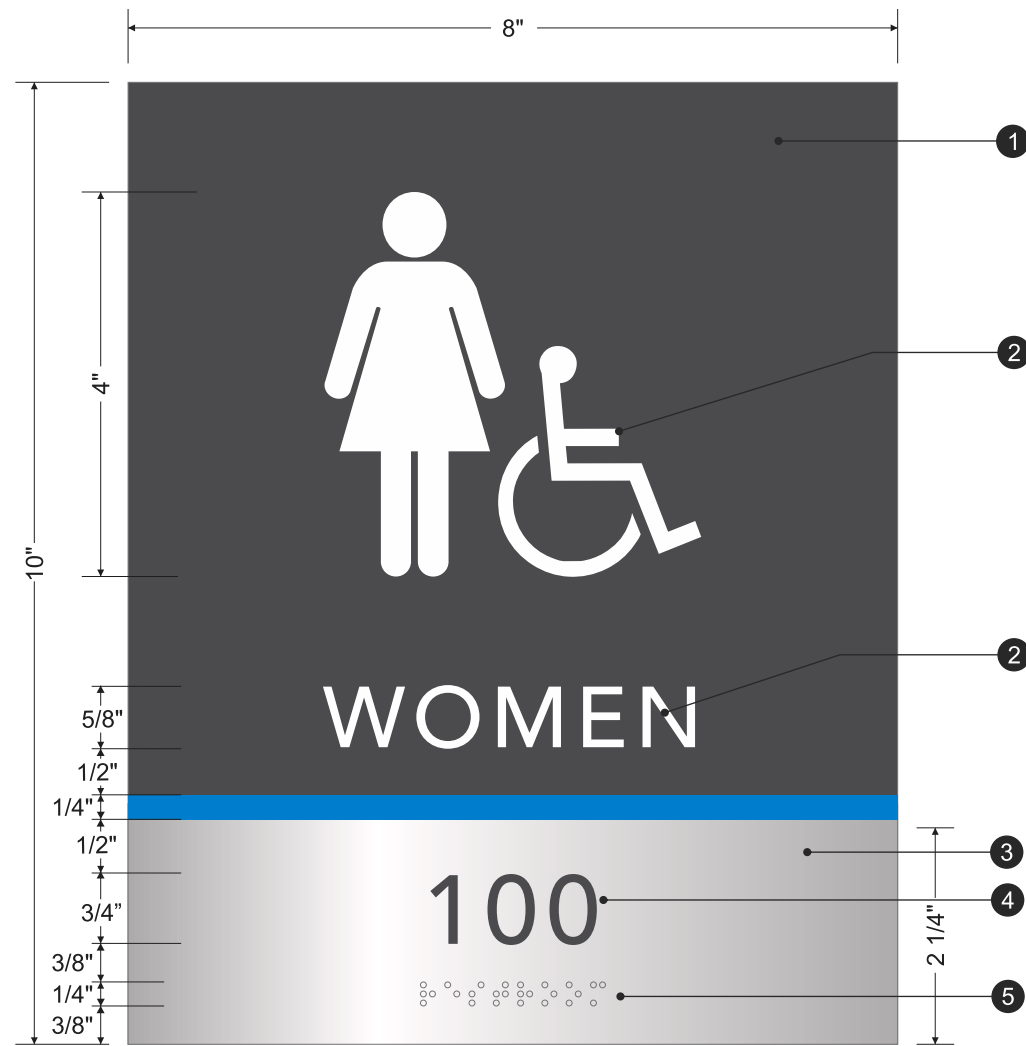

Front View
Scale: 1/2 of actual size

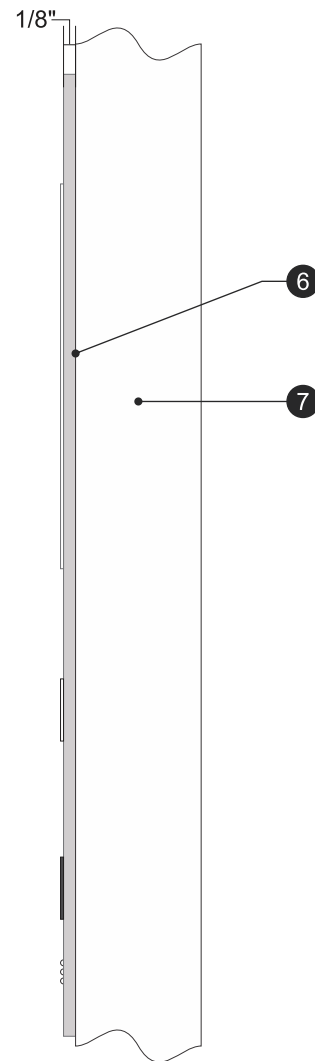



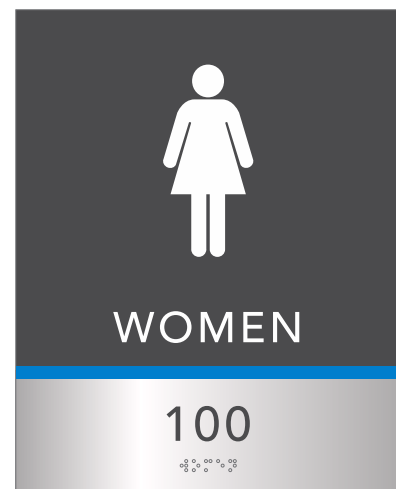

Side View
Scale: 1/2 of actual size



Alternative Sign (For Non-ADA Restrooms)
Scale: 3" = 1'-0"

NOTES:


- 1/8" thick single sided thermocompressed acrylic painted MP18071 with a 1/4" wide line painted MP79568 with matte non-glare finish.
- 1/32" Raised, Paint MP 27386.
- Paint MP18071.
- 1/32" Raised, Paint AkzoNobel 499F5;Font: Avenir Next LT Pro Medium.
- Grade II Braille, clear.
- VHB tape & silicone to wall.
- Typical wall.

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE. PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




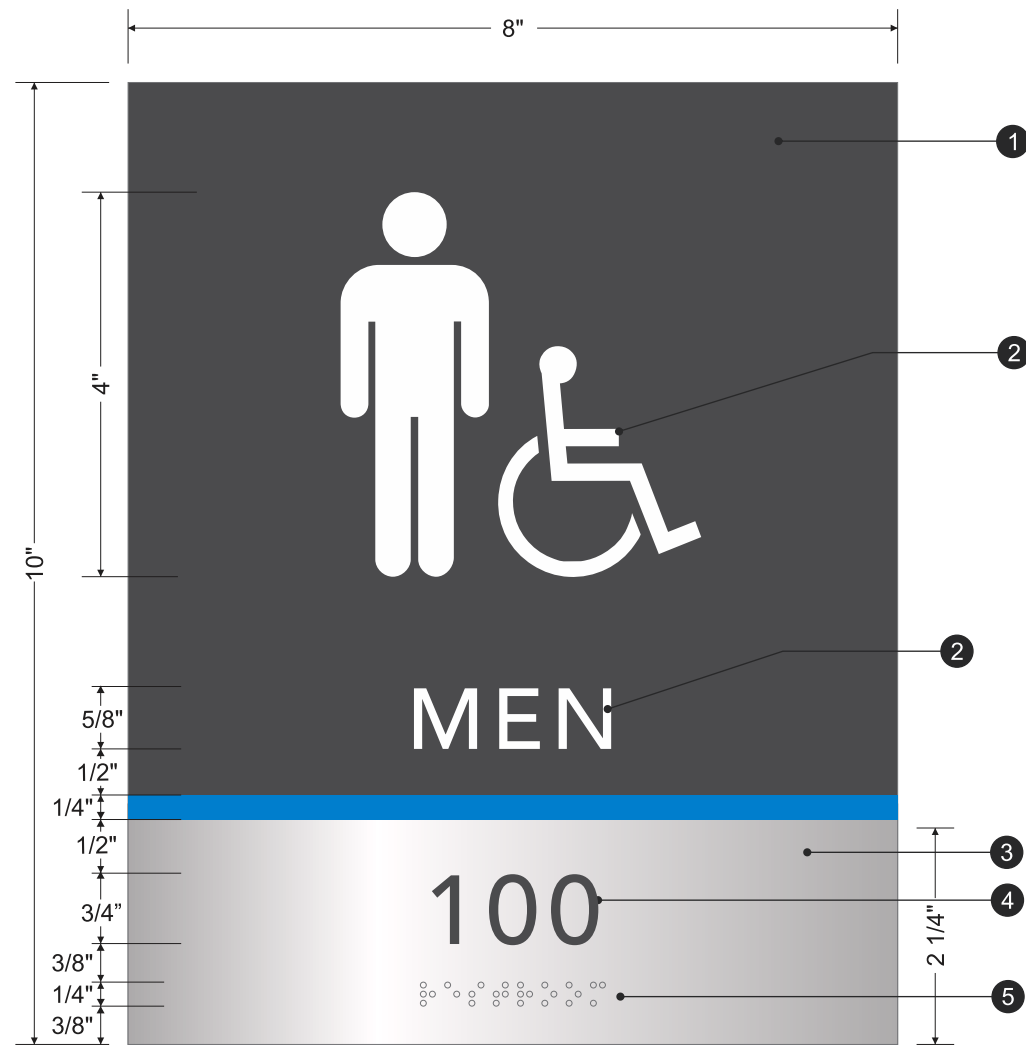

Front View
Scale: 1/2 of actual size

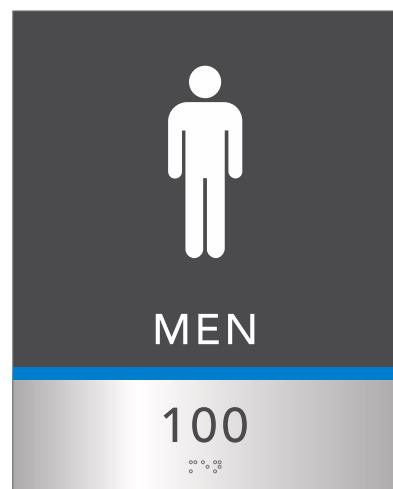



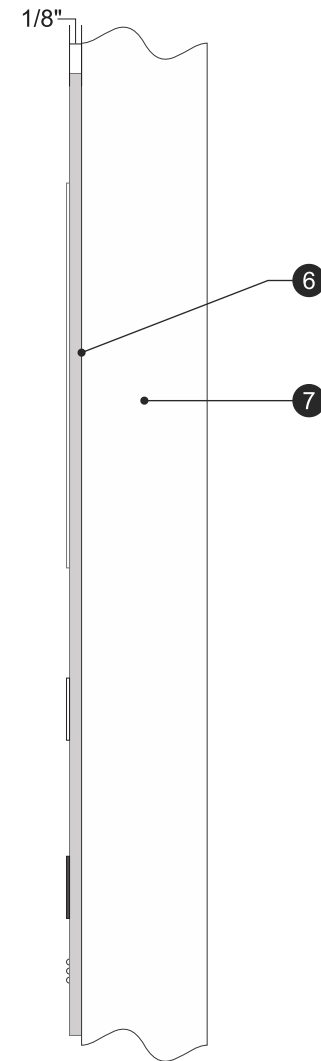

Alternative Sign (For Non-ADA Restrooms)
Scale: 3" = 1'-0"



Side View
Scale: 1/2 of actual size

NOTES:


1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint MP 27386.
3. Paint MP18071.
4. 1/32" Raised, Paint AkzoNobel 499F5; Font: Avenir Next LT Pro Medium.
5. Grade II Braille, clear.
6. VHB tape & silicone to wall.
7. Typical wall.

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM 229425
Drawing Number:

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



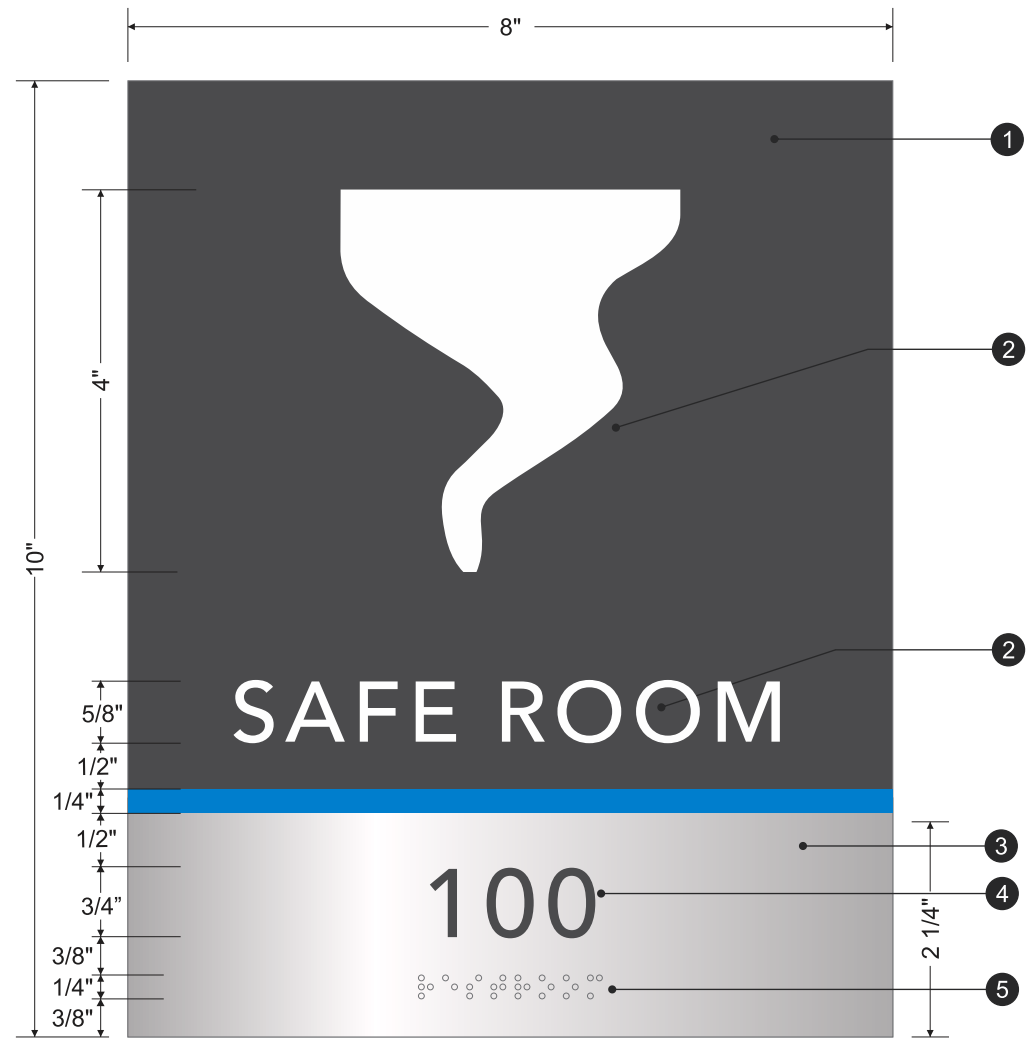



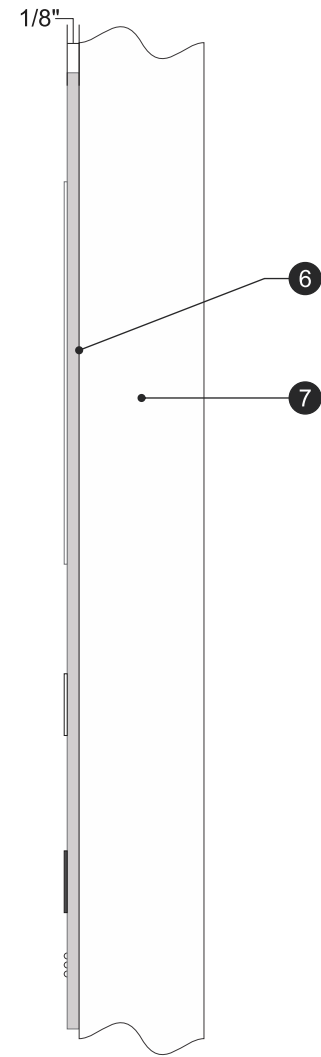

Front View
Scale: 1/2 of actual size



Side View
Scale: 1/2 of actual size

NOTES:

1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint MP 27386.
3. Paint MP18071.
4. 1/32" Raised, Paint AkzoNobel 499F5;Font: Avenir Next LT Pro Medium.
5. Grade II Braille, clear.
6. VHB tape & silicone to wall.
7. Typical wall.

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.





Front View
Scale: 1/2 of actual size

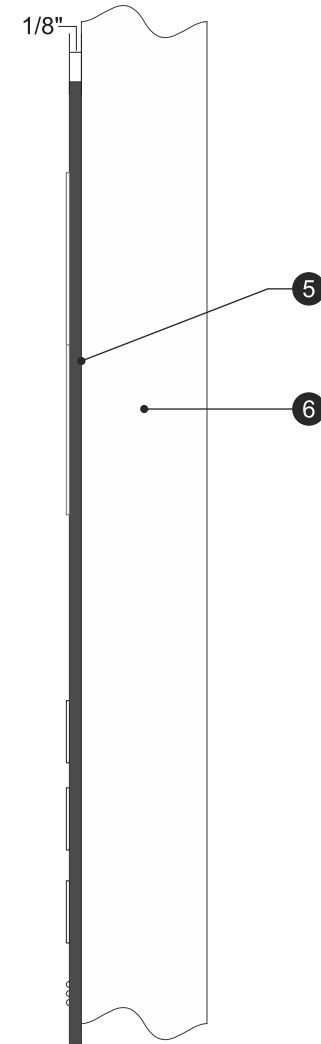


Side View
Scale: 1/2 of actual size


- NOTES:**
- 1/8" thick single sided thermocompressed acrylic painted AKZONOBEL 499F5 with a 1/4" wide line painted MP79568 with matte non-glare finish.
 - 1/32" Raised, Paint MP 27386.
 - 1/32" Raised, Paint Mp27386; Font: Avenir Next LT Pro Medium.
 - Grade II Braille, clear.
 - VHB tape & silicone to wall.
 - Typical wall.

- MP79568
- MP27386
- AkzoNobel 499F5*

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM 229425
Drawing Number:

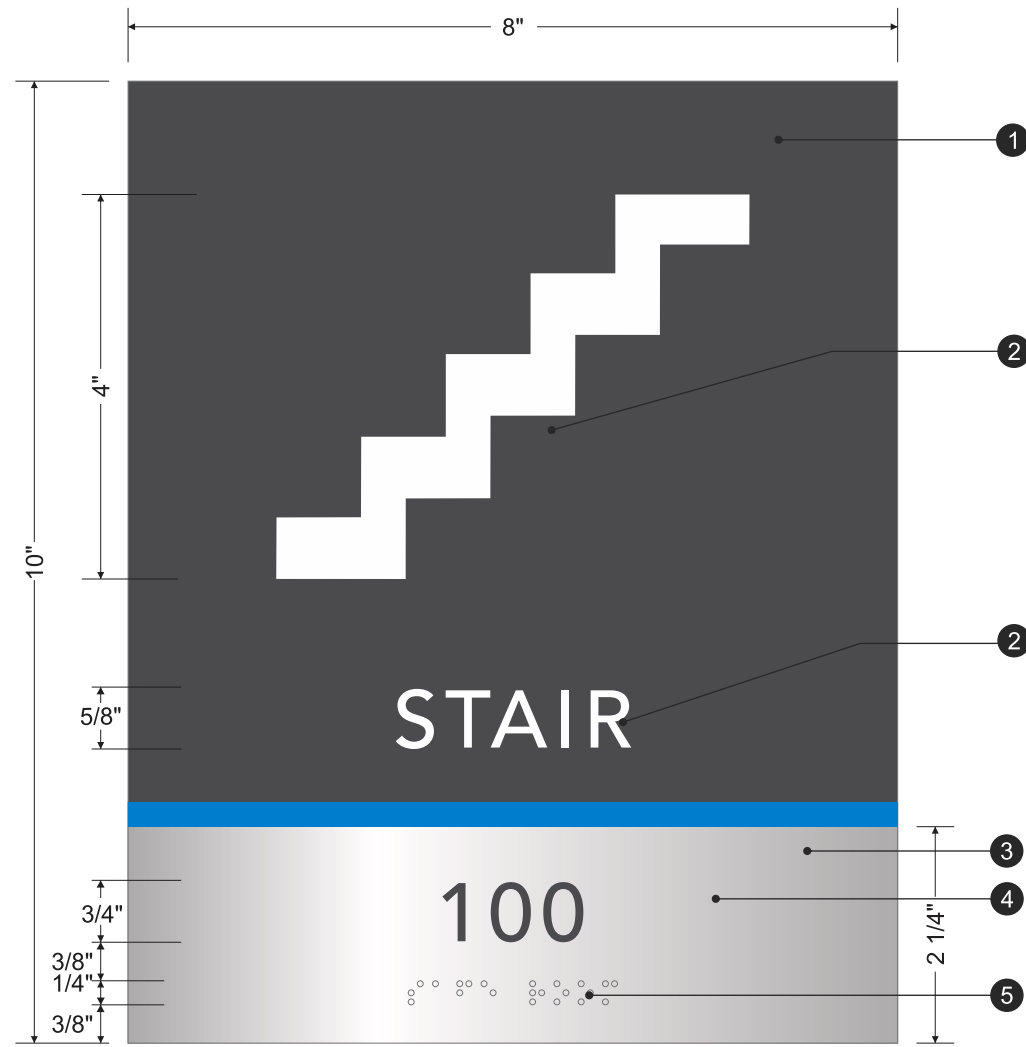



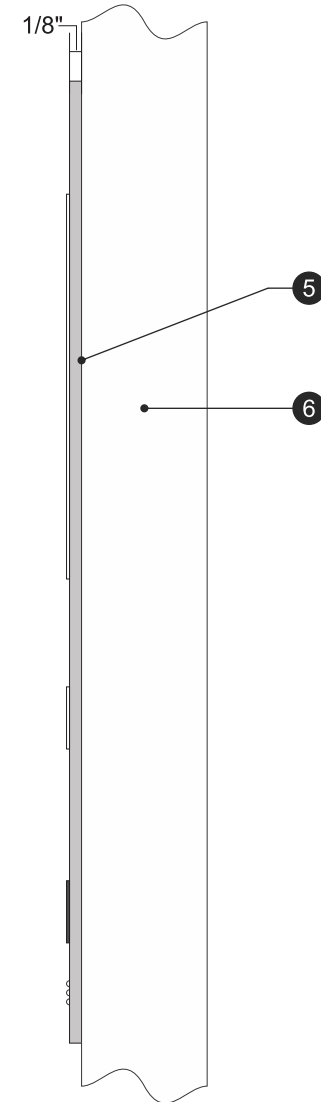

Front View
Scale: 1/2 of actual size



Side View
Scale: 1/2 of actual size

NOTES:


1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint MP 27386.
3. Paint MP18071.
4. 1/32" Raised, Paint AkzoNobel 499F5; Font: Avenir Next LT Pro Medium.
5. Grade II Braille, clear.
6. VHB tape & silicone to wall.
7. Typical wall.

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



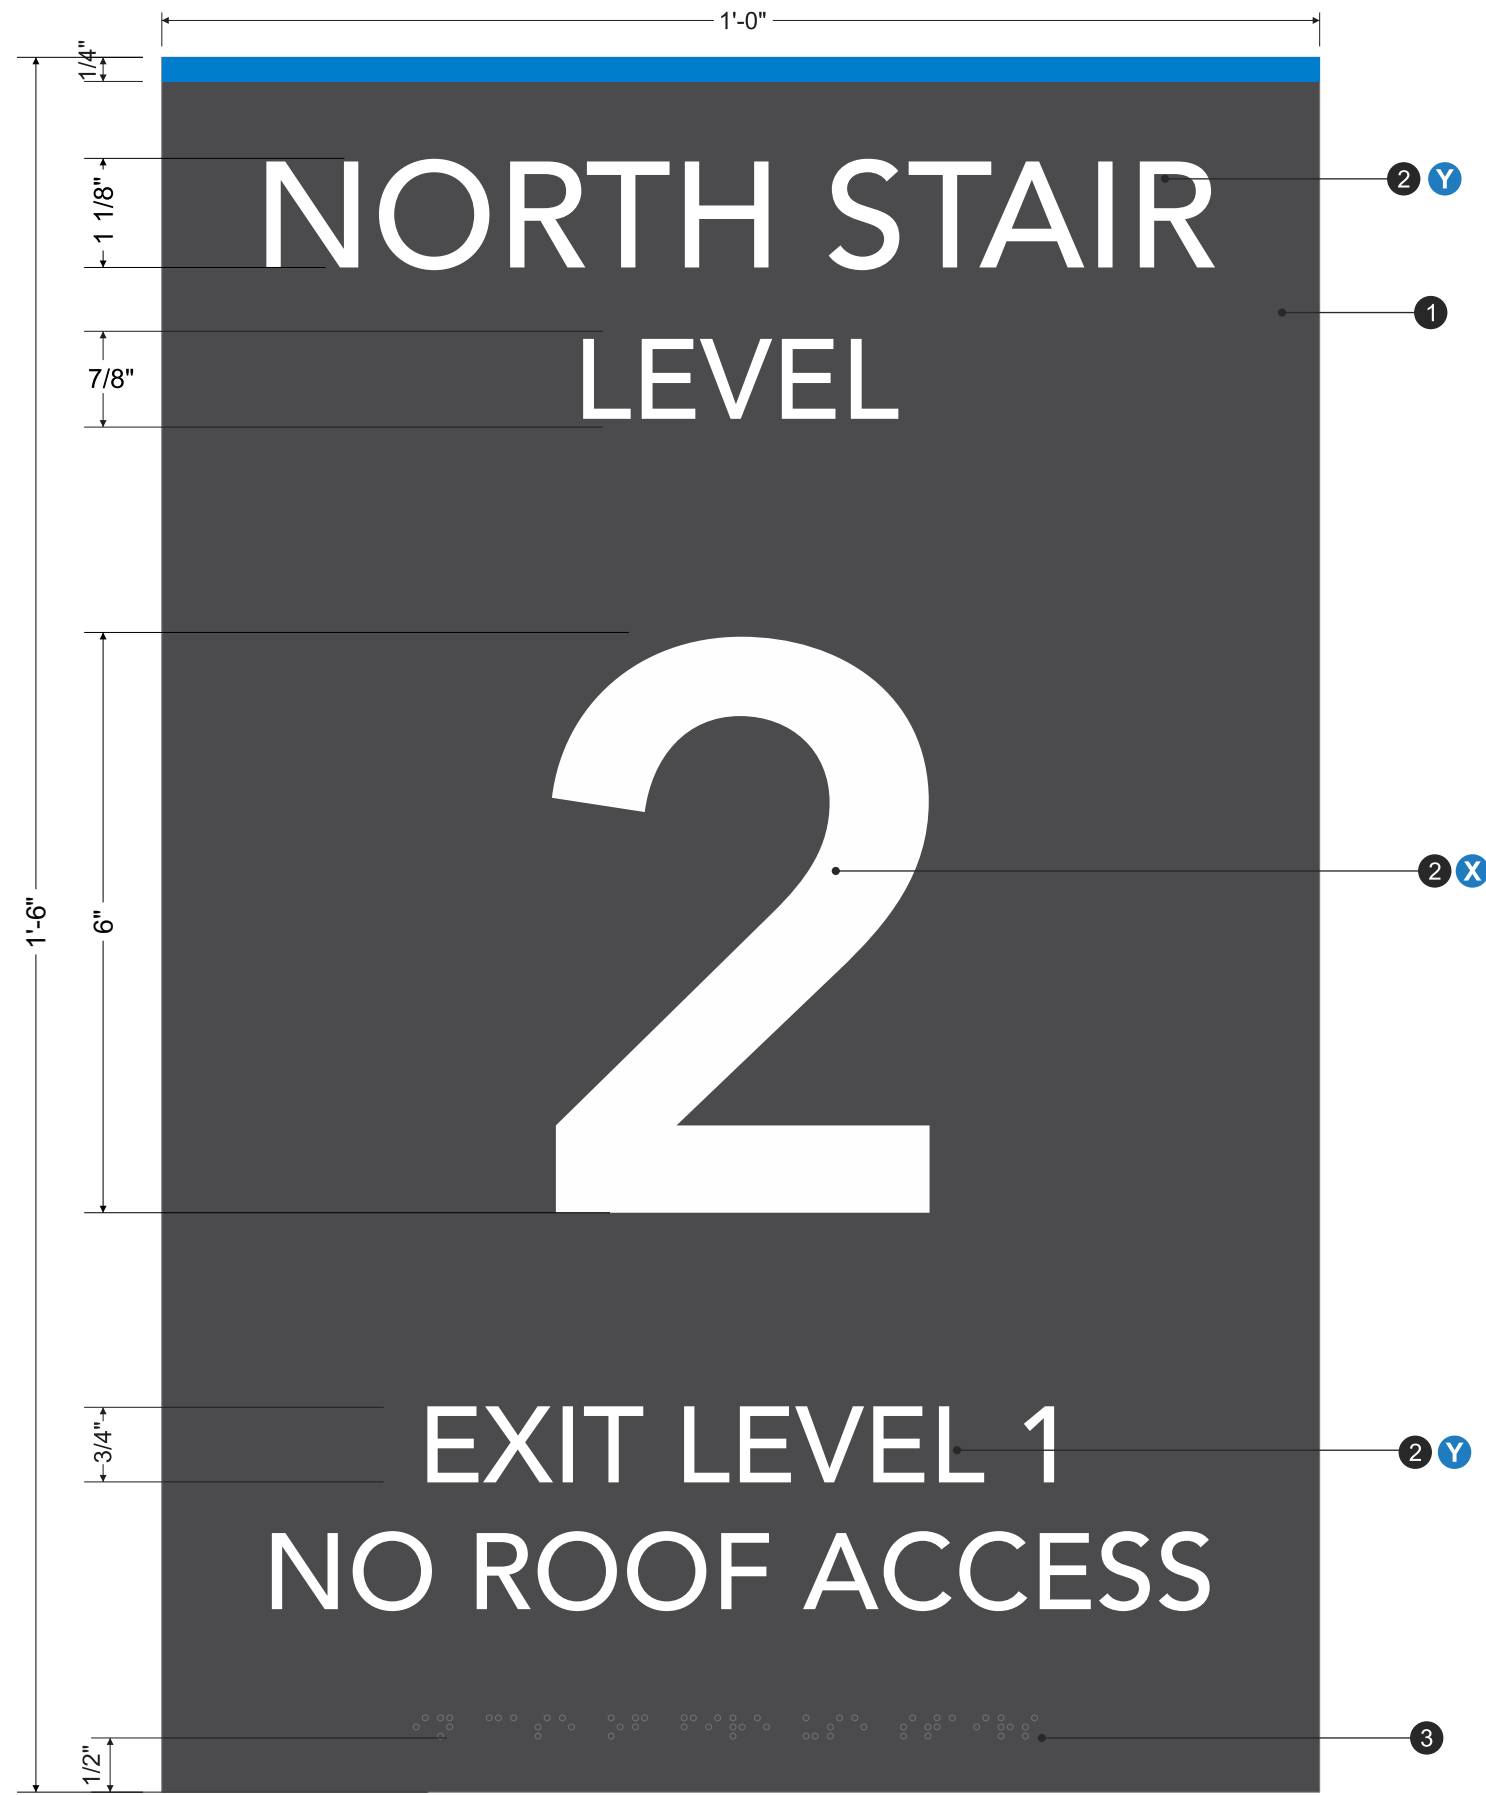

Front View
Scale: 1/2 of actual size

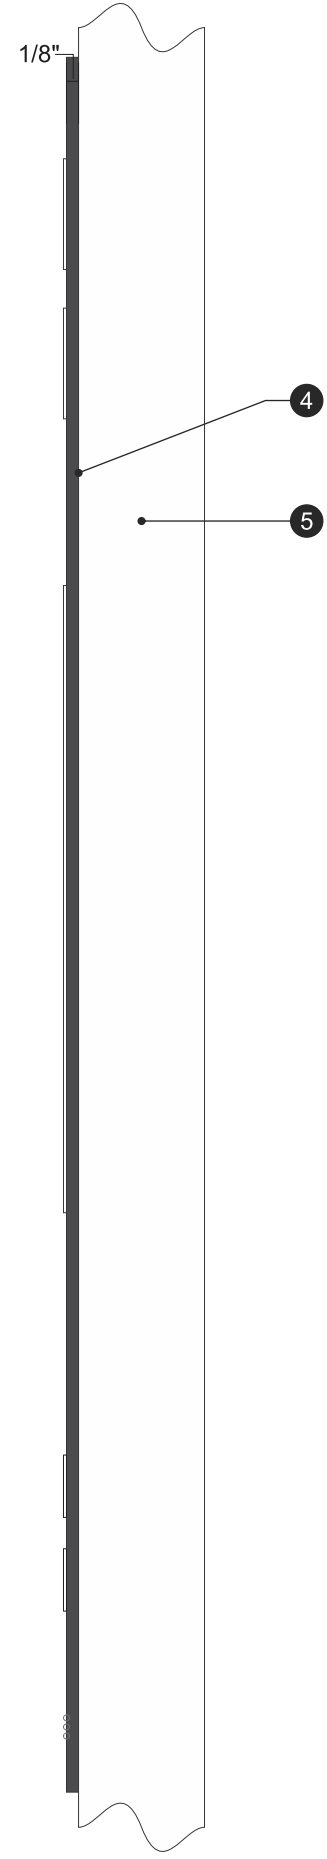

Side View
Scale: 1/2 of actual size

NOTES:

1. 1/8" thick single sided thermocompressed acrylic painted AkzoNobel 499F5 with a 1/4" wide line painted MP79568 with matte non-glare finish.

2. 1/32" Raised, Paint MP27386

3. Grade II Braille, clear.

4. VHB tape & silicone to wall.

5. Typical wall.

Note:

1. Specialty fonts to be used on this sign type.

X Avenir Next Pro Demi

Y Avenir LT Std 65 Medium

○ MP27386

● MP79568

● AkzoNobel 499F5*

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.






KNIGHT SIGN INDUSTRIES, INC.


5959 Knight Ave. Tuscaloosa, AL 35405
www.knightsign.com 205.345.5242

NOTES:

1. 1/8" thick single sided thermocompressed acrylic painted MP18071 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint MP27386; Font: Avenir Next LT Pro Medium.
3. Grade II Braille, clear.
4. VHB tape & silicone to wall.
5. Typical wall.

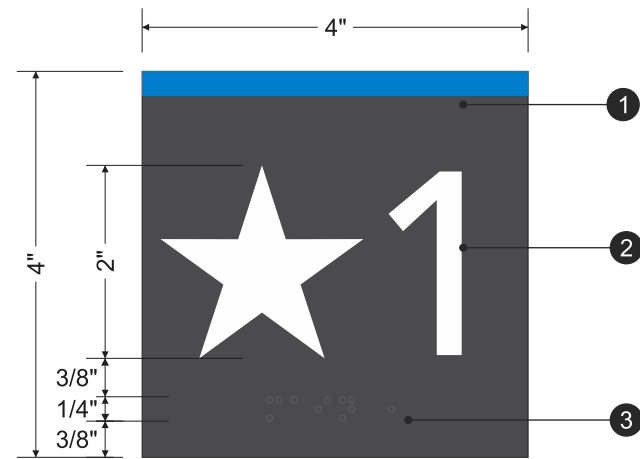

Front View
Scale: 1/2 of actual size

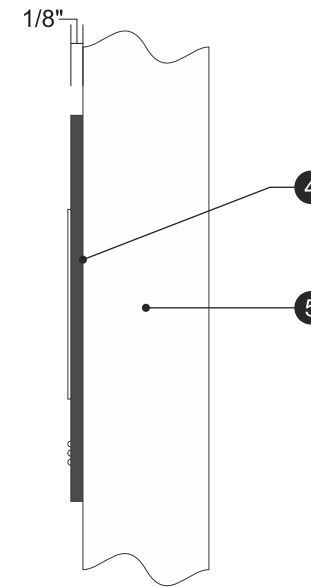

Side View
Scale: 1/2 of actual size

○ MP27386

● MP79568

● AkzoNobel 499F5*

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.





NOTES:

1. 1/8" thick acrylic painted PMS 123C Yellow
2. Screenprinted text 1st surface, MP30116. Font: Avenir Next LT Pro Medium.
3. VHB tape & silicone to wall.
6. Typical wall.



Front View
 Scale: 1/2 of actual size

NOTE: WIDTH VARIES; TO MATCH SIZE OF ROOM ID SIGN MOUNTED ABOVE.

-  Pantone 123C
-  MP30116


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
 229425
Drawing Number:

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




NOTES:


1. .090" Aluminum channel attached to backer panel, paint MP18071 Metallic Silver.
2. .125" thick filler piece, paint MP18071 Metallic Silver, between backer panel and changeable panel.
3. .125" changable panel, painted MP30116 with Digital Print applied 1st surface.
4. .125" thick aluminum backer panel.
5. Mount to wall with countersunk screws concealed behind channel face.

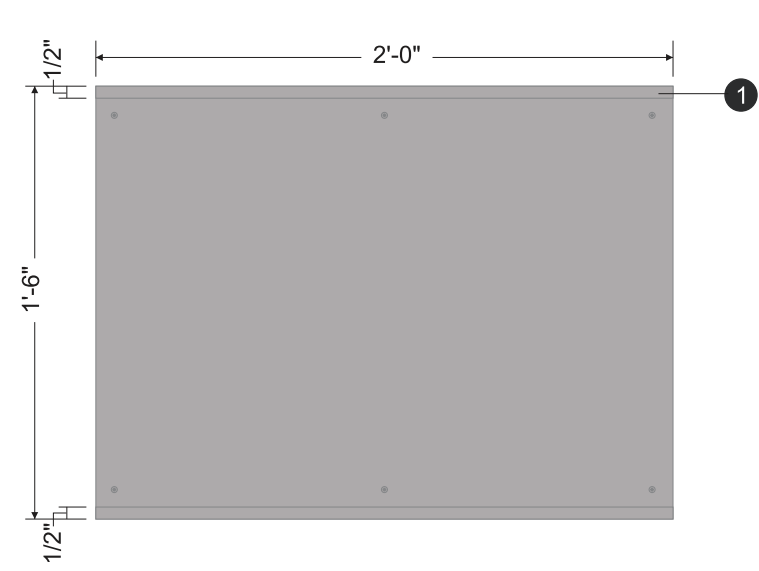


Aluminum Frame
 Scale: 1 1/2" = 1'-0"

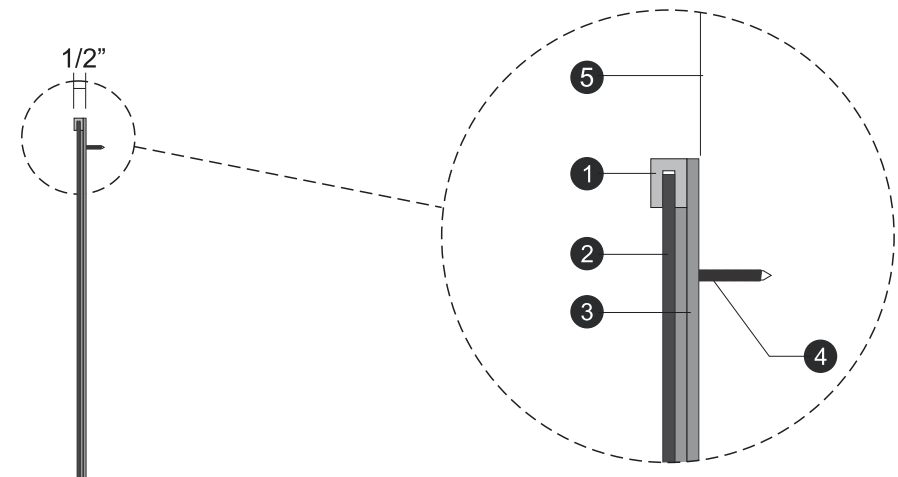

Side View
 Scale: 1/2 of actual size

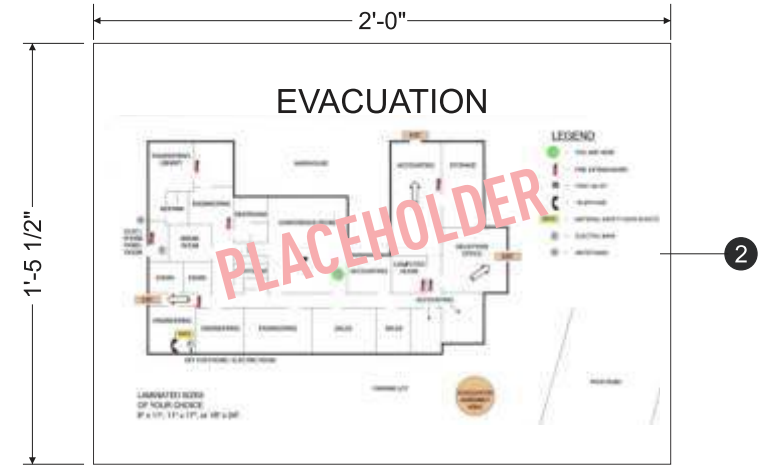

Interchangeable Acrylic Panel Detail
 Scale: 1 1/2" = 1'-0"

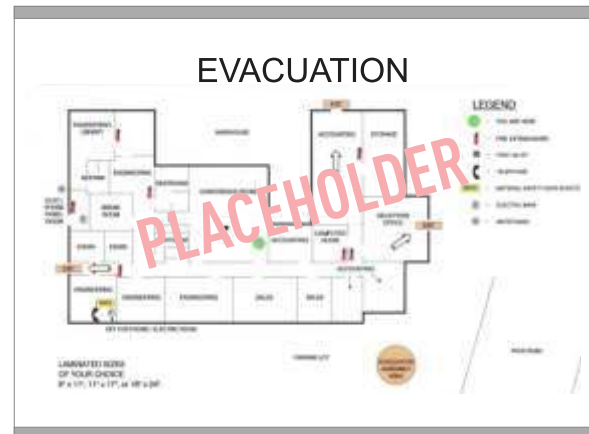

Front View (Assembled)
 Scale: 1 1/2" = 1'-0"

-  MP30116
-  MP18071 Metallic Silver

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.





inpro.com | 800.222.5556

QUOTE: 536576 ACCOUNT: XXXXXX

SS-CUSTOM

Production: Painted PETG / Printed Text
Size: 14.25 x 17
Shape: Phoenix 1

Mounting: VHB Tape


Font: Avenir
Font Size: 1"
Justification: Top / Center

COLORS:

Face: MP18071
Text: CMYK Black
Accent: PMS 3005 C
Window Back: 0101 Designer White

MATERIALS:

SS200501NG	.0833
SSPHOTO- MP18071	
SS-PRINTERINKS	2
SS200501NG	.0667
SS200501NG	.0833
SSPHOTO-0101	

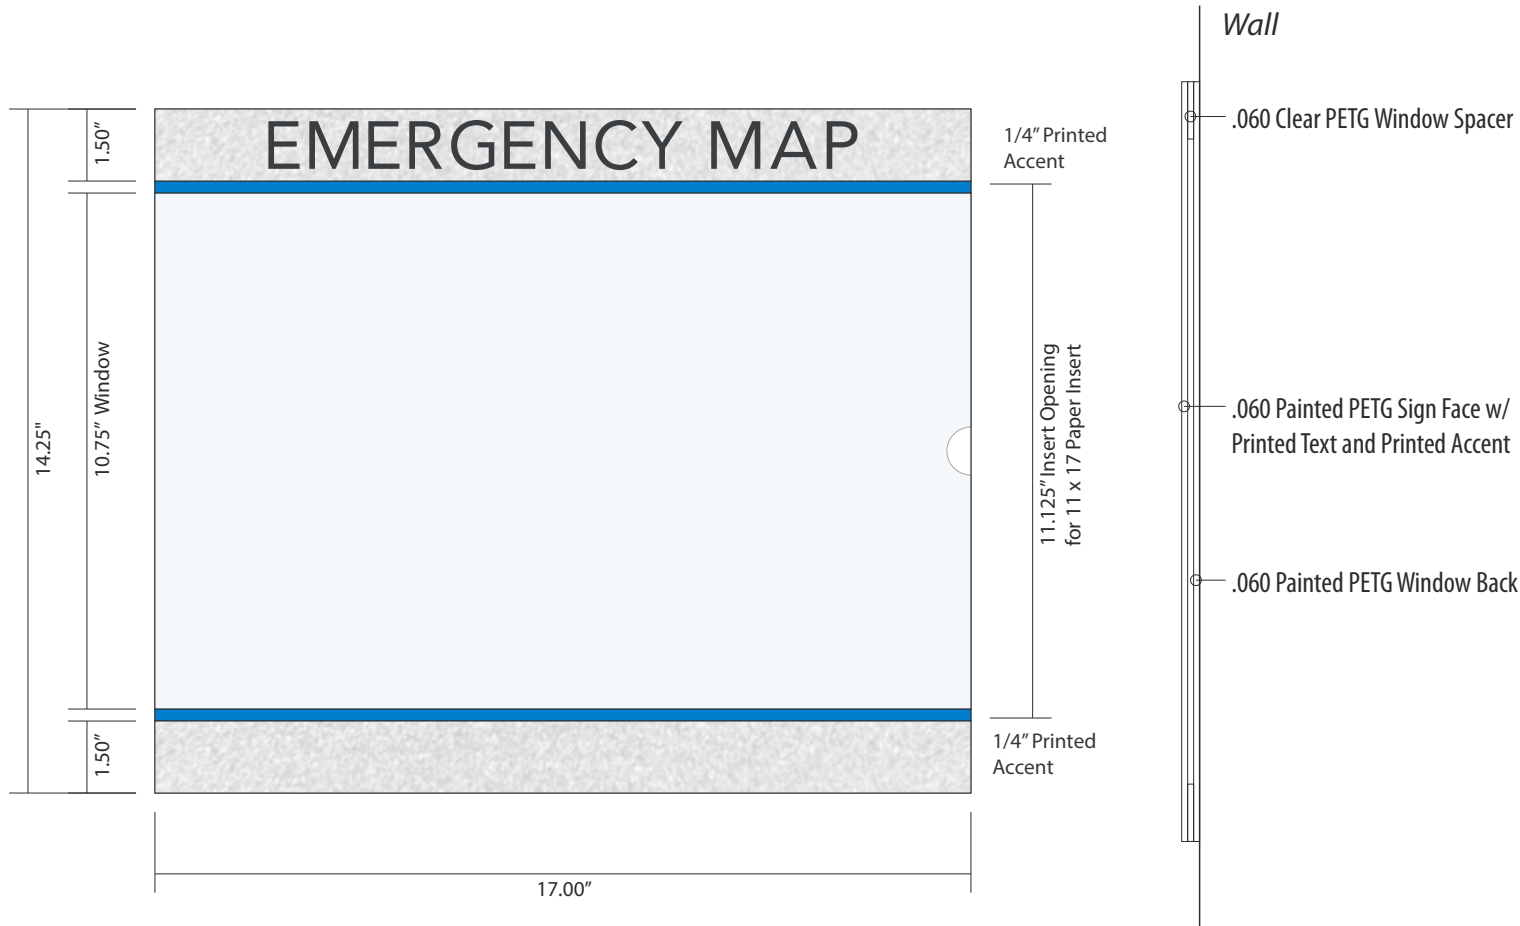


Notes:
Second Surface Paint and Print Application


Scale: 1" = 4"

NOTES:

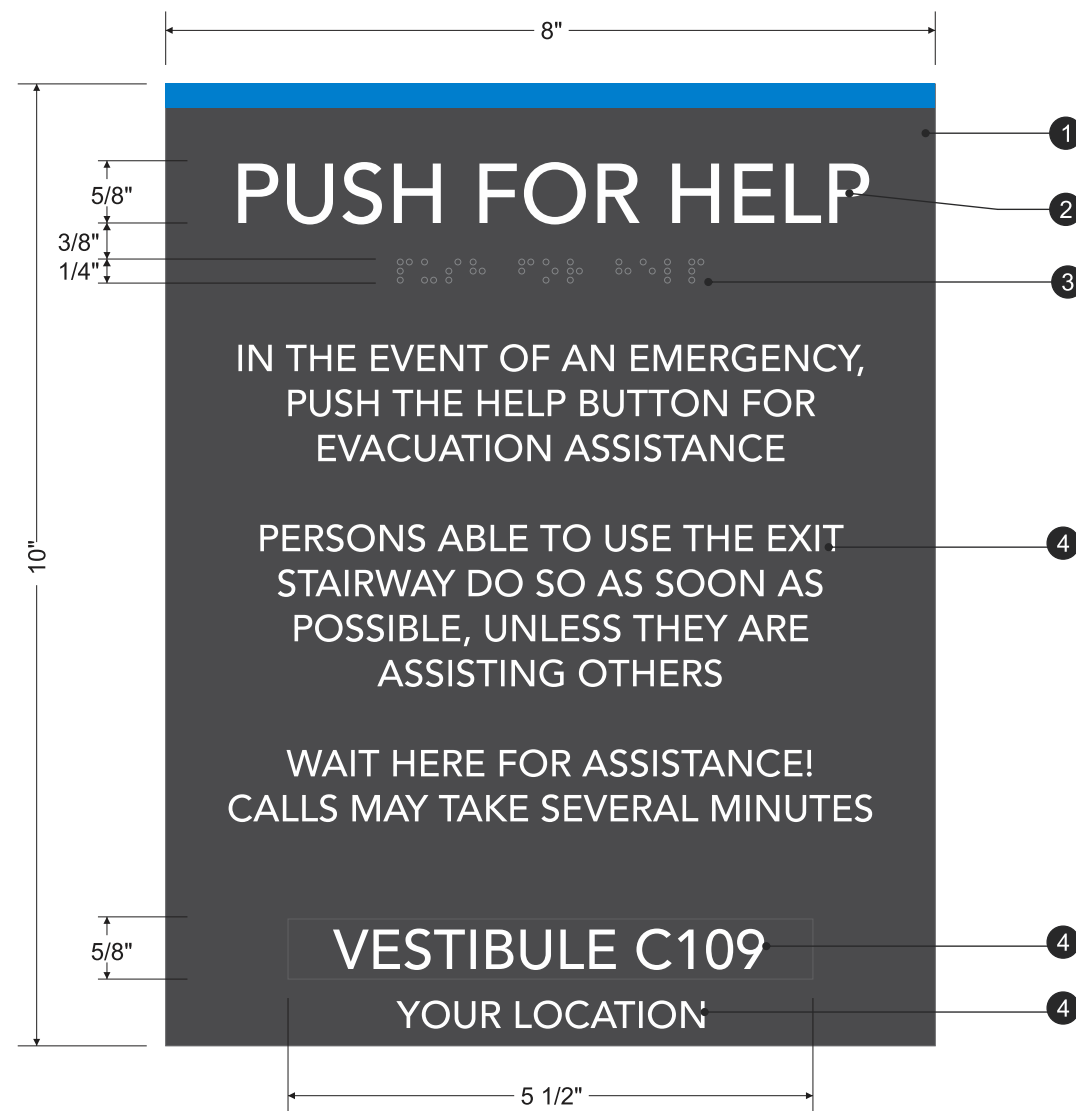


1. 1/8" thick single sided thermocompressed acrylic painted AkzoNobel 499F5 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. 1/32" Raised, Paint MP27386; Font: Avenir Next LT Pro Medium.
3. Grade II Braille, clear.
4. Screen printed text MP27386; Font: Avenir Next LT Pro Medium.
5. VHB tape & silicone to wall.
7. Typical wall.

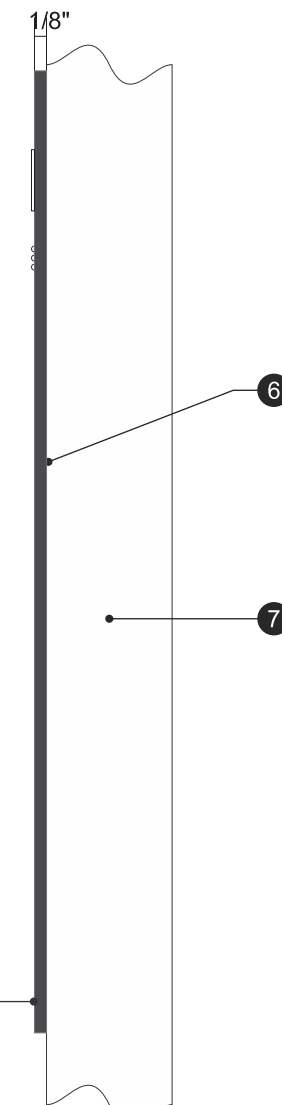

Front View
 Scale: 1/2 of actual size



Side View
 Scale: 3" = 1'-0"

-  MP27386
-  MP79568
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




NOTES:



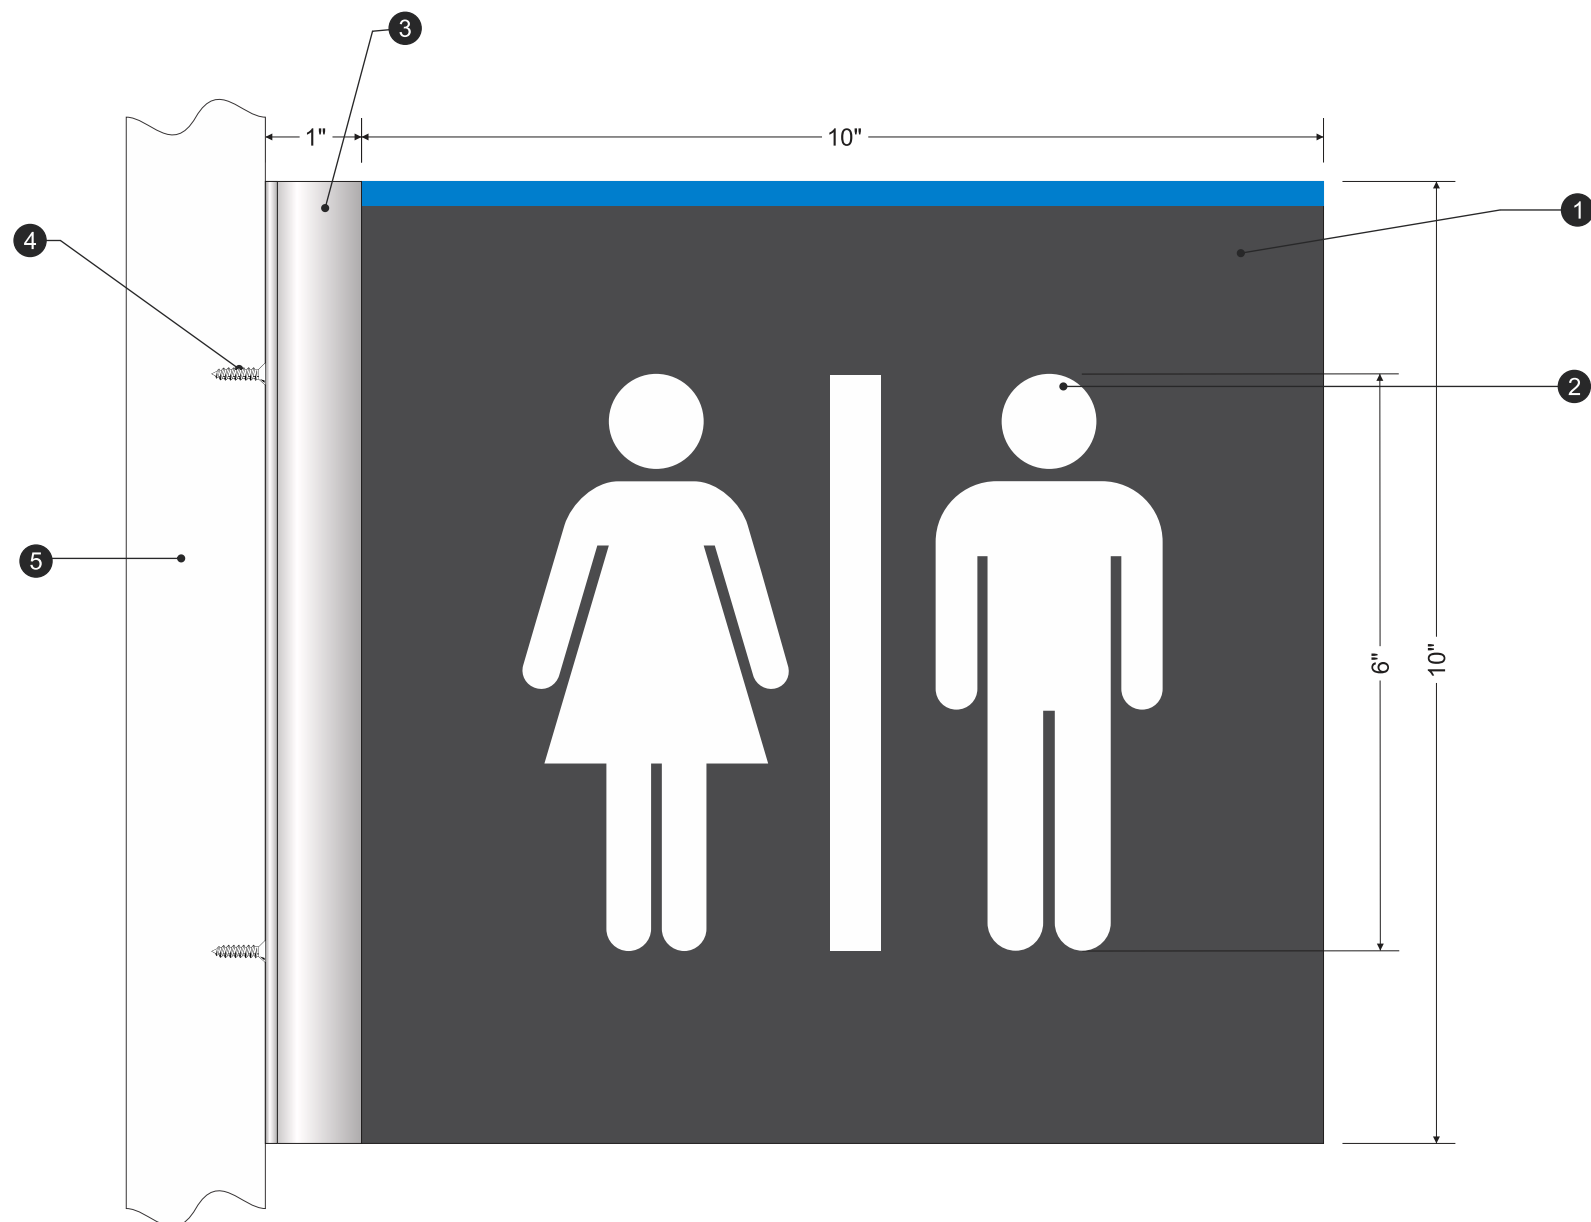

1. 1/8" thick double sided aluminum blade sign painted Akzo Nobel 499F5 with a 1/4" wide line painted MP79568 with matte non-glare finish.
2. Paint MP27386
3. 1" angle brackets painted MP18071 aluminum with double sided banner tape to hold aluminum panel.
4. Secure to wall with countersunk screws, painted to match angle.
5. Typical wall.

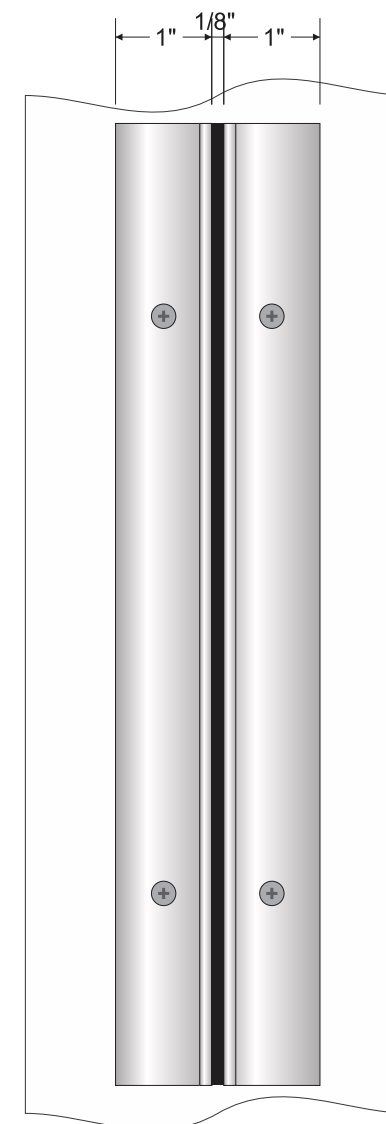

Front View
 Scale: 1/2 of actual size




Side View
 Scale: 1/2 of actual size

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




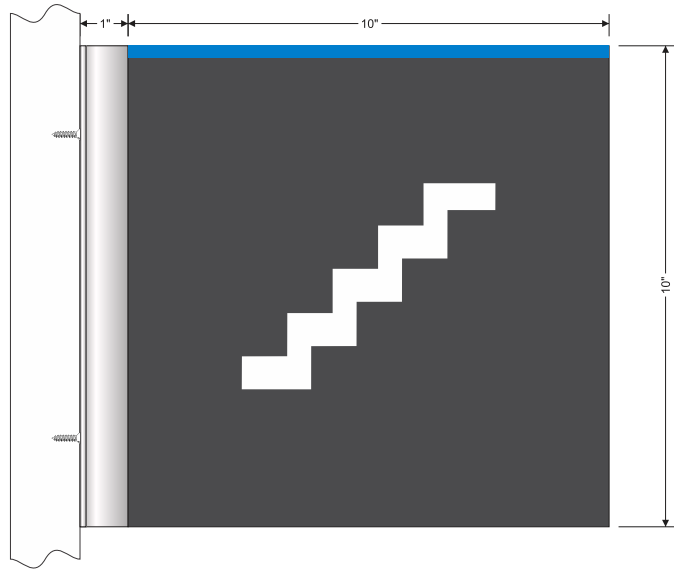


Flag Sign C2 STAIRWELL ID FLAG SIGN
Scale: 3" = 1-0"

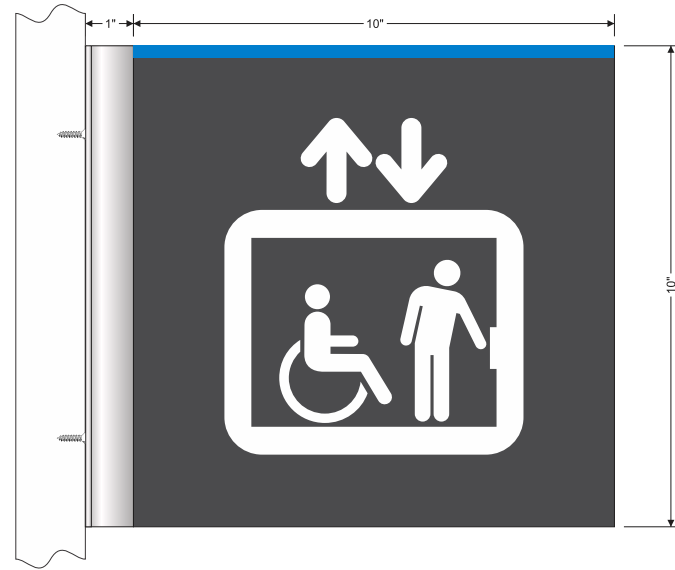


Flag Sign C3 ELEVATOR ID FLAG SIGN
Scale: 3" = 1-0"

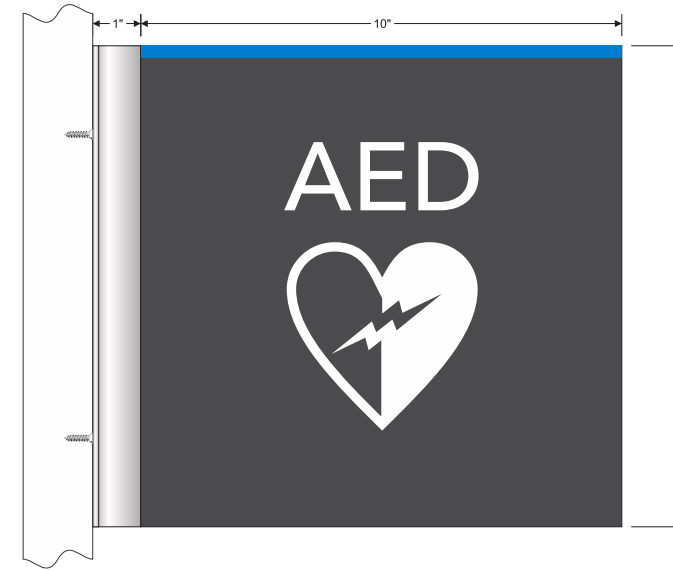

Flag Sign C4 AED ID FLAG SIGN
Scale: 3" = 1-0"

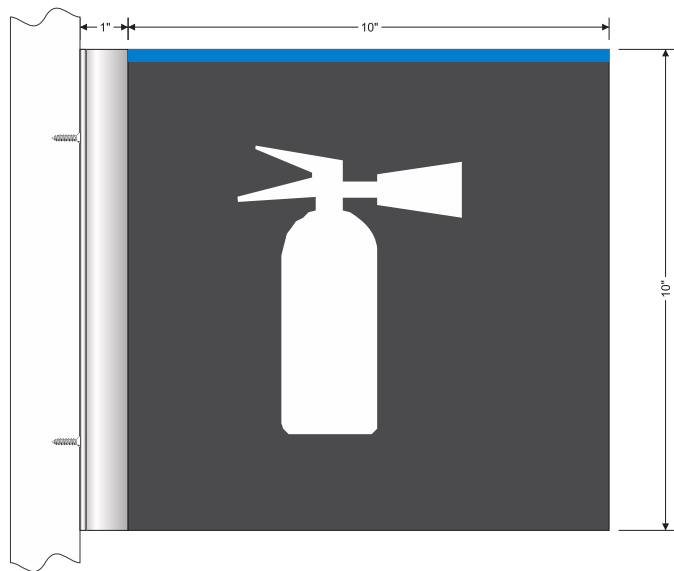


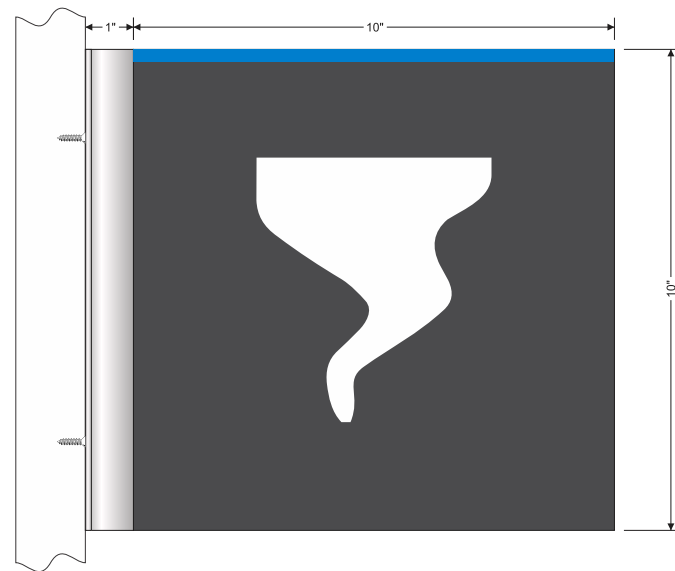


Flag Sign C5 FIRE EXTINGUISHER ID FLAG SIGN
Scale: 3" = 1-0"





Flag Sign C6 SAFE ROOM ID FLAG SIGN
Scale: 3" = 1-0"


- NOTES:**
- 1/8" Thick aluminum, paint horizontal brushed finish.
 - 3M Black opaque vinyl.
Font: Avenir Next LT Pro Medium.
 - 1" angle brackets painted horizontal brushed aluminum with double sided banner tape to hold aluminum panel.
 - Secure to wall with countersunk screws, painted to match angle.
 - Typical wall.

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*


Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.




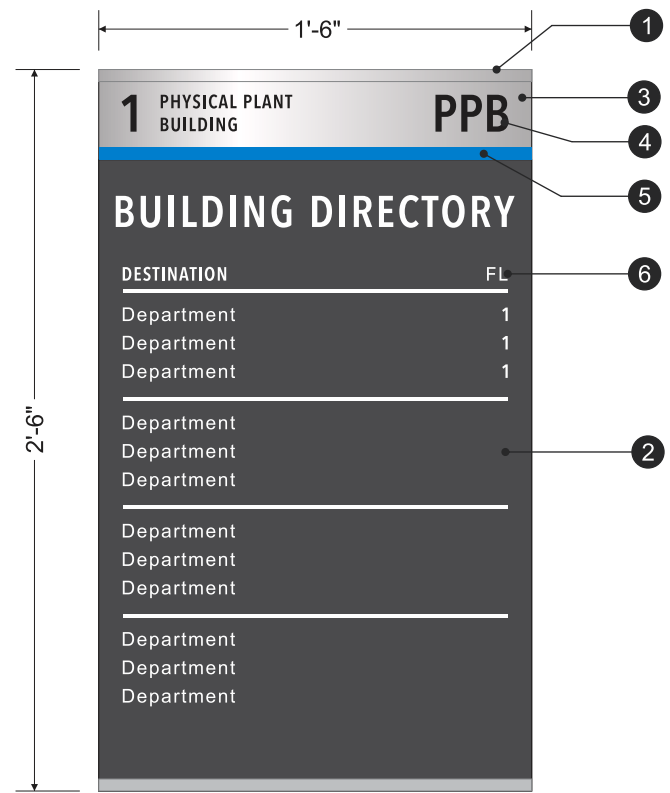


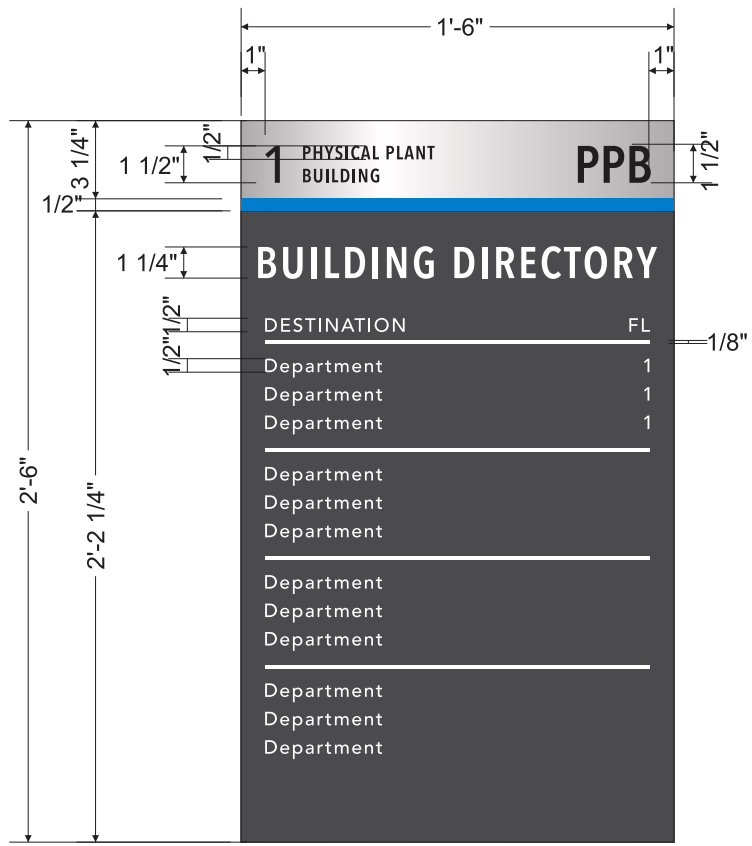
Front View
Scale: 1 1/2" = 1'-0"

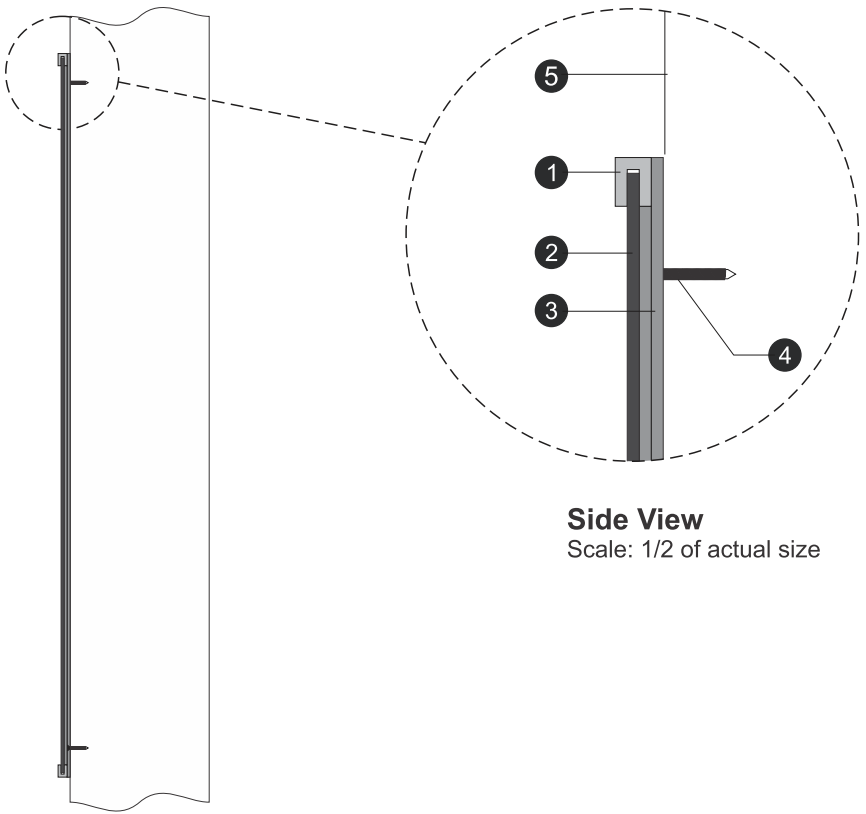

Side View
Scale: 1/2 of actual size

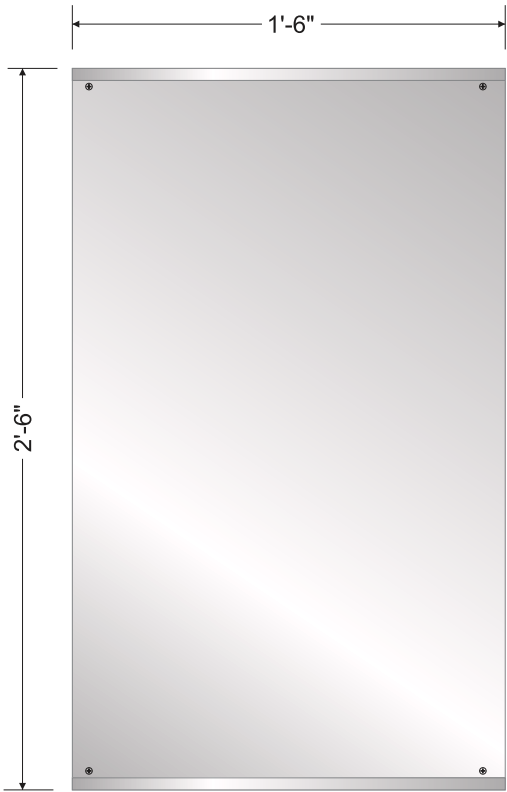

Aluminum Frame
Scale: 1 1/2" = 1'-0"



Interchangeable Acrylic Panel Detail
Scale: 1 1/2" = 1'-0"

NOTES:

1. .090" Aluminum channel attached to backer panel, paint MP18071 Metallic Silver, .125" thick filler piece, paint MP18071 Metallic Silver, between backer panel and changeable panel.
2. .125" changeable panel, painted MP30116 with Digital Print applied 1st surface.
3. .125" thick aluminum backer panel.
4. Screenprinted text, Mp30116; Font: Avenir Next LT Pro Cn Bold.
5. 1/2" wide divider bar painted MP79568.
6. Screenprinted text, Mp27386. Font: Avenir Next LT Pro Cn Medium.
7. Existing Wall
8. Mount to wall with countersunk screws concealed behind channel face; screws painted to match frame.

- MP27386
- MP79568
- MP18071 Metallic Silver
- AkzoNobel 499F5*
- MP30116

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.






KNIGHT SIGN INDUSTRIES, INC.

5959 Knight Ave. Tuscaloosa, AL 35405
www.knightsign.com 205.345.5242


NOTES:

- 1/8" thick single sided thermocompressed acrylic painted AkzoNobel 499F5 and MP18071 Metallic Silver with 1/4" wide lines painted MP79568 with matte nonglare finish.
- 1/32" Raised, Paint Mp30116; Font: Avenir Next Pro Cn Medium.
- 1/32" Raised, Paint Mp27386; Font: Avenir Next LT Pro Cn Medium.
- Mount to wall with VHB tape and silicone.
- Typical Wall


-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*
-  MP30116

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.

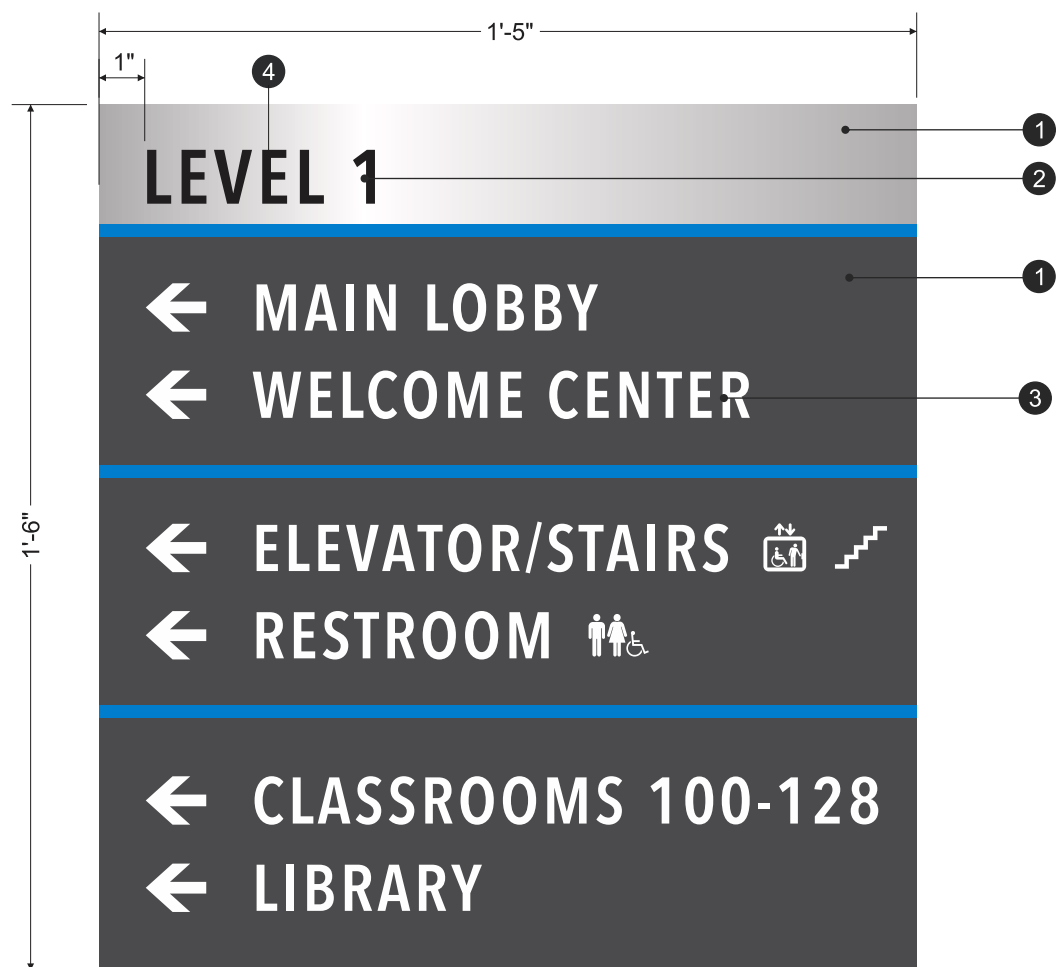


Front View
Scale: 3" = 1'-0"

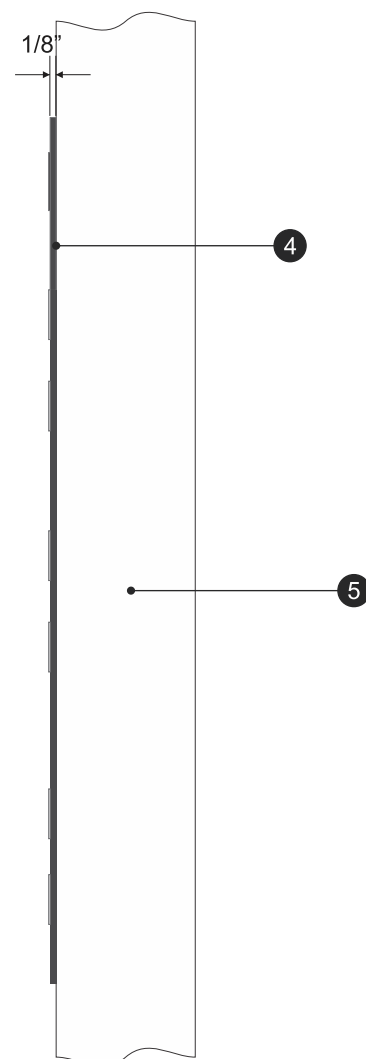



Side View
Scale: 3" = 1'-0"

NOTES:



1. 1/8" thick double sided aluminum Overhead directional sign painted Akzo Nobel 499F5 with a 3/4" wide line painted MP79568 with matte non-glare finish.
2. Paint MP27386, Font: Next LT Pro Cn Medium.
3. 1" angle brackets painted MP18071 aluminum.
4. Secure to ceiling with countersunk screws, painted to match angle.
5. Typical ceiling.

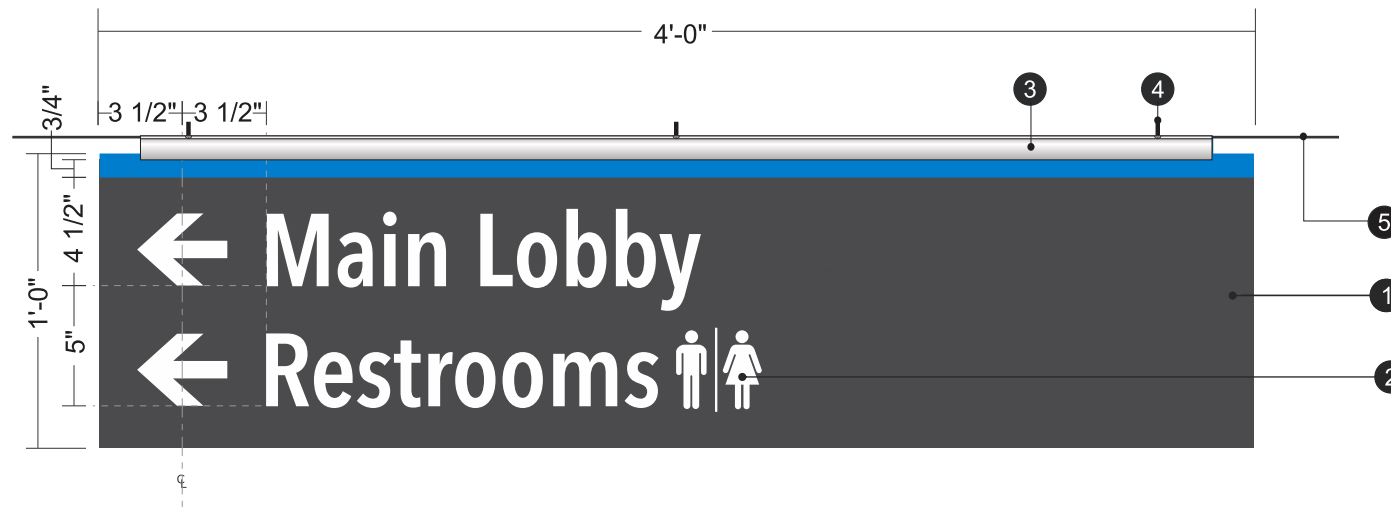



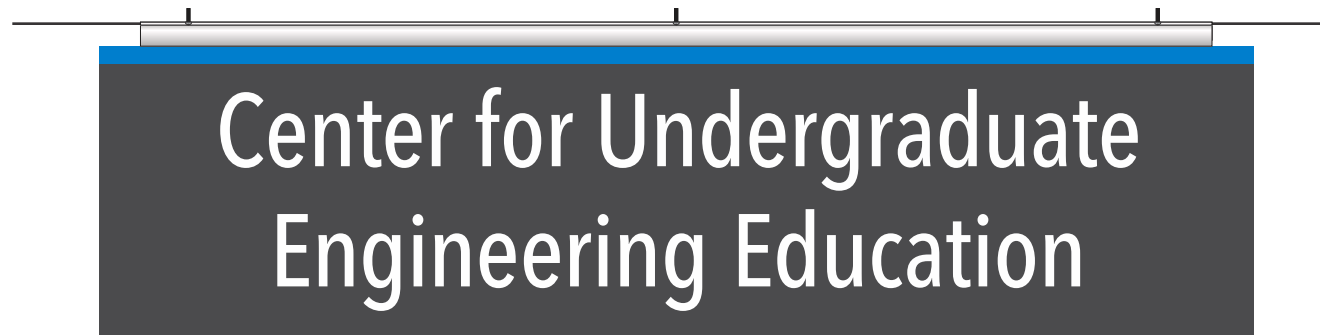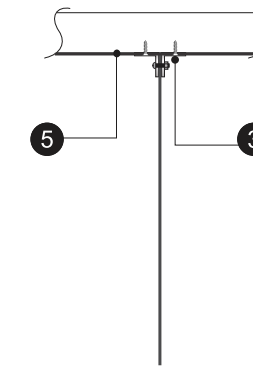

Overhead Directional (Ceiling Mounted)
 Scale: 1 1/2" = 1'-0"

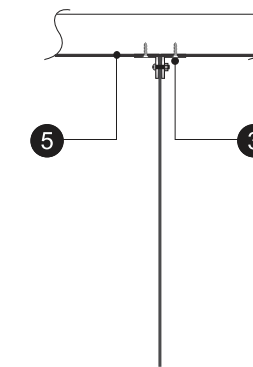

Overhead ID (Ceiling Mounted)
 Scale: 1 1/2" = 1'-0"



Alternate Layouts
 Scale: 3/4" = 1'-0"

-  MP27386
-  MP79568
-  MP18071 Metallic Silver
-  AkzoNobel 499F5*

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425


THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.



NOTES:


1. 1/8" thick acrylic face panel painted MP18071 Metallic Silver leaving clear window with 1/4" wide lines painted MP79568 with matte non-glare finish.
2. 1/4" thick acrylic back panel painted MP18071 Metallic Silver.
3. Merge face panel and back panel with acrylic spacer.
4. Secure to wall with VHB Tape & silicone.
5. Typical wall.
6. For glass mounted locations, add 3/16" thick black acrylic backer applied to 2nd surface of glass with VHB tape. Backer to be same size as frame and installed aligned with frame to conceal vhb tape.
7. Glass Wall
8. 11" x 8 1/2" paper insert

 MP79568


 MP18071 Metallic Silver

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippett / AM
Drawing Number: 229425


THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN. SIGNS DESIGNED FOR 120V SERVICE; PLEASE NOTIFY KSI IF POWER SOURCE IS DIFFERENT.

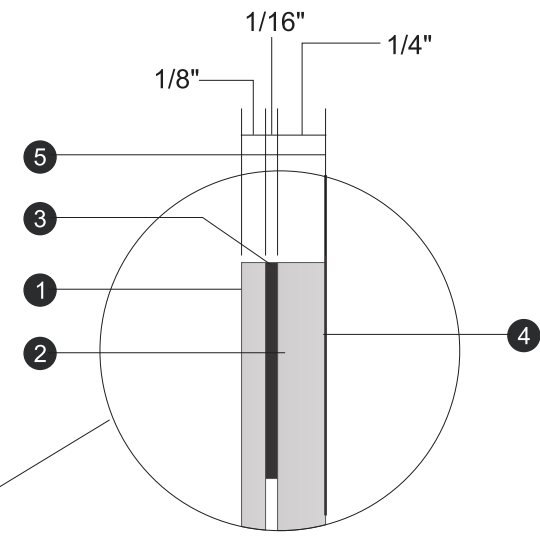


Section View (Wall Applications)
Scale: FULL SIZE

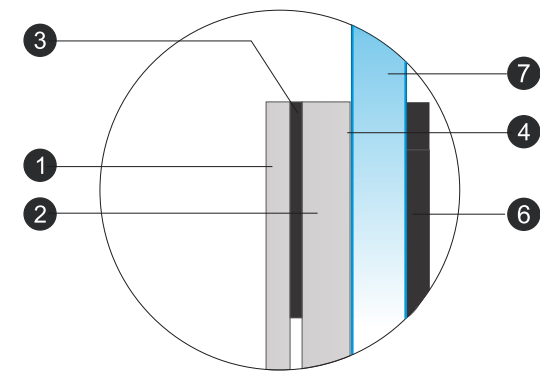

Section View (Glass Applications)
Scale: FULL SIZE




Side View
Scale: 3" = 1'-0"

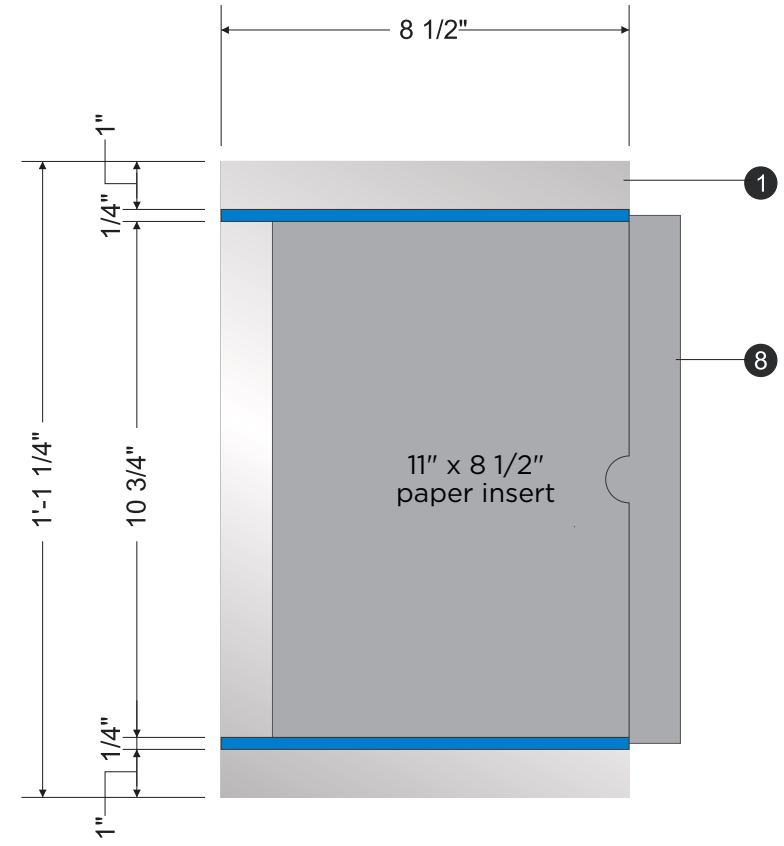


Front View
Scale: 3" = 1'-0"

NOTES:

1. 1/8" thick acrylic face panel painted MP18071 Metallic Silver leaving clear window with 1/4" wide lines painted MP79568 with matte non-glare finish.
2. 1/4" thick acrylic back panel painted MP18071 Metallic Silver.
3. Merge face panel and back panel with acrylic spacer.
4. Secure to wall with VHB Tape & silicone.
5. Typical wall.
6. For glass mounted locations, add 3/16" thick black acrylic backer applied to 2nd surface of glass with VHB tape. Backer to be same size as frame and installed aligned with frame to conceal vhb tape.
7. Glass Wall
8. 8 1/2" x 11" paper insert

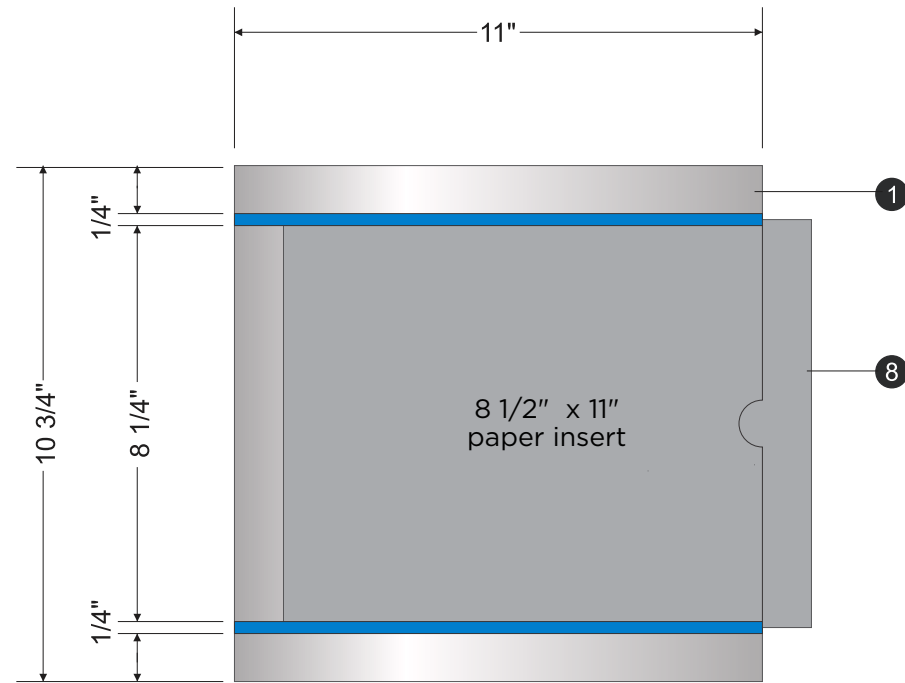

Front View
 Scale: 3" = 1'-0"

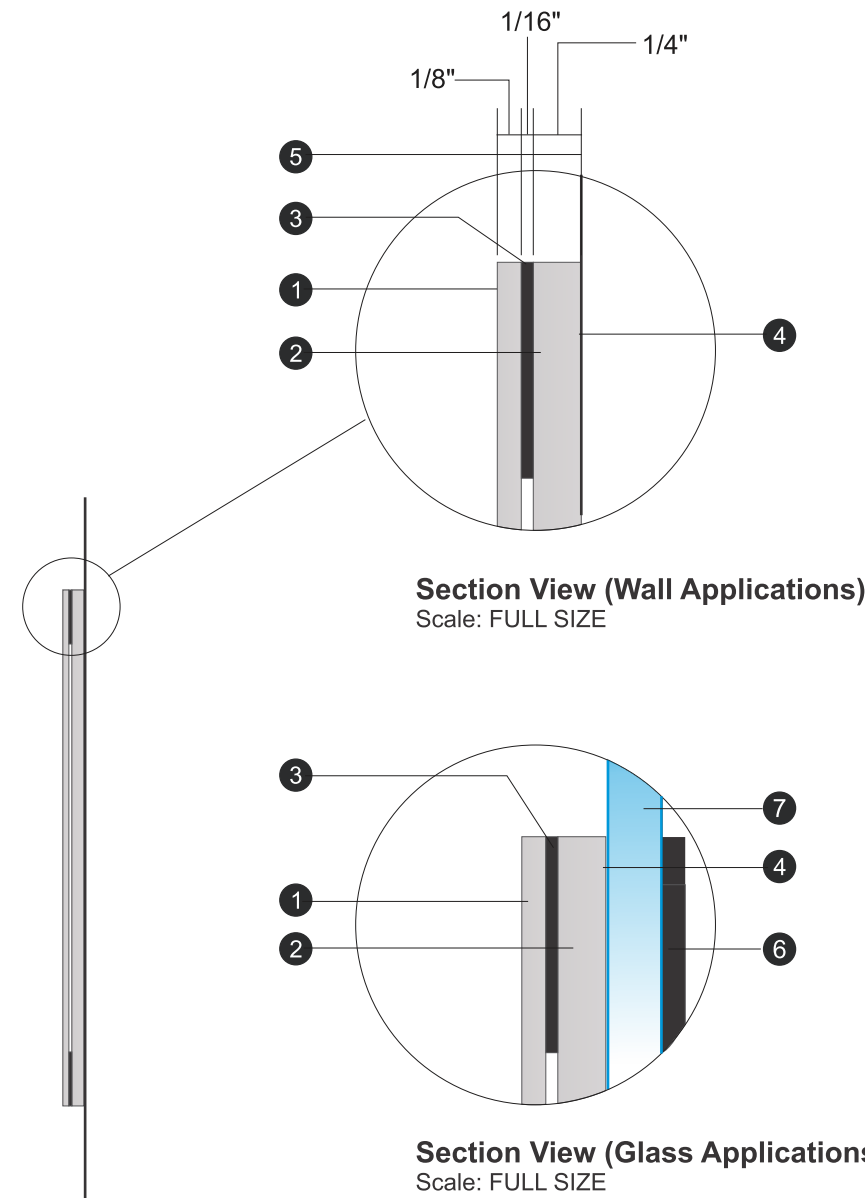


Section View (Wall Applications)
 Scale: FULL SIZE

Section View (Glass Applications)
 Scale: FULL SIZE

Side View
 Scale: 3" = 1'-0"

 MP79568

 MP18071 Metallic Silver

Date: April 5, 2021
Job Name: UAH
Job Location: Huntsville, AL
Salesperson: A. Cicero
Designer: J. Tippet / AM
Drawing Number: 229425